

DAISY-MINI-W

~55° wide beam

SPECIFICATION:

Dimensions	279.5 x 21.0
Height	13.3 mm
Fastening	pin, screw, snaps
ROHS compliant	yes ⓘ

MATERIALS:

Component	Type	Material	Colour	Finish	Length
F17030_DAISY-MINI-W	Linear lens	PMMA	clear		275.0
F17667_DAISY-MINI-SHD-MET-MATT	Shade	PC	metal	matt	21.0
F17666_DAISY-MINI-SHD-MET	Shade	PC	metal	gloss	20.0
F17465_DAISY-MINI-SHD-WHT-MATT	Shade	PC	white	matt	20.0
F17034_DAISY-MINI-SHD-MATT	Shade	PC	black	matt	20.0
F17033_DAISY-MINI-SHD-WHT	Shade	PC	white	gloss	20.0
F17028_DAISY-MINI-SHD	Shade	PC	black	gloss	20.0


ORDERING INFORMATION:

Quantities for one set:

Linear lens	1
Shade	1



Component		Qty in box	MOQ	MPQ	Box weight (kg)
F17030_DAISY-MINI-W	Linear lens	252	252	12	5.8
» Box size: 398 x 298 x 265 mm					
F17465_DAISY-MINI-SHD-WHT-MATT	Shade	252	252	4	6.2
» Box size: 398 x 298 x 265 mm					
F17666_DAISY-MINI-SHD-MET	Shade	252	252	4	5.9
» Box size: 398 x 298 x 265 mm					
F17033_DAISY-MINI-SHD-WHT	Shade	252	252	4	5.9
» Box size: 398 x 298 x 265 mm					
F17667_DAISY-MINI-SHD-MET-MATT	Shade	252	252	4	6.2
» Box size: 398 x 298 x 265 mm					
F17034_DAISY-MINI-SHD-MATT	Shade	252	252	4	6.1
» Box size: 398 x 298 x 265 mm					
F17028_DAISY-MINI-SHD	Shade	252	252	4	5.9
» Box size: 398 x 298 x 265 mm					

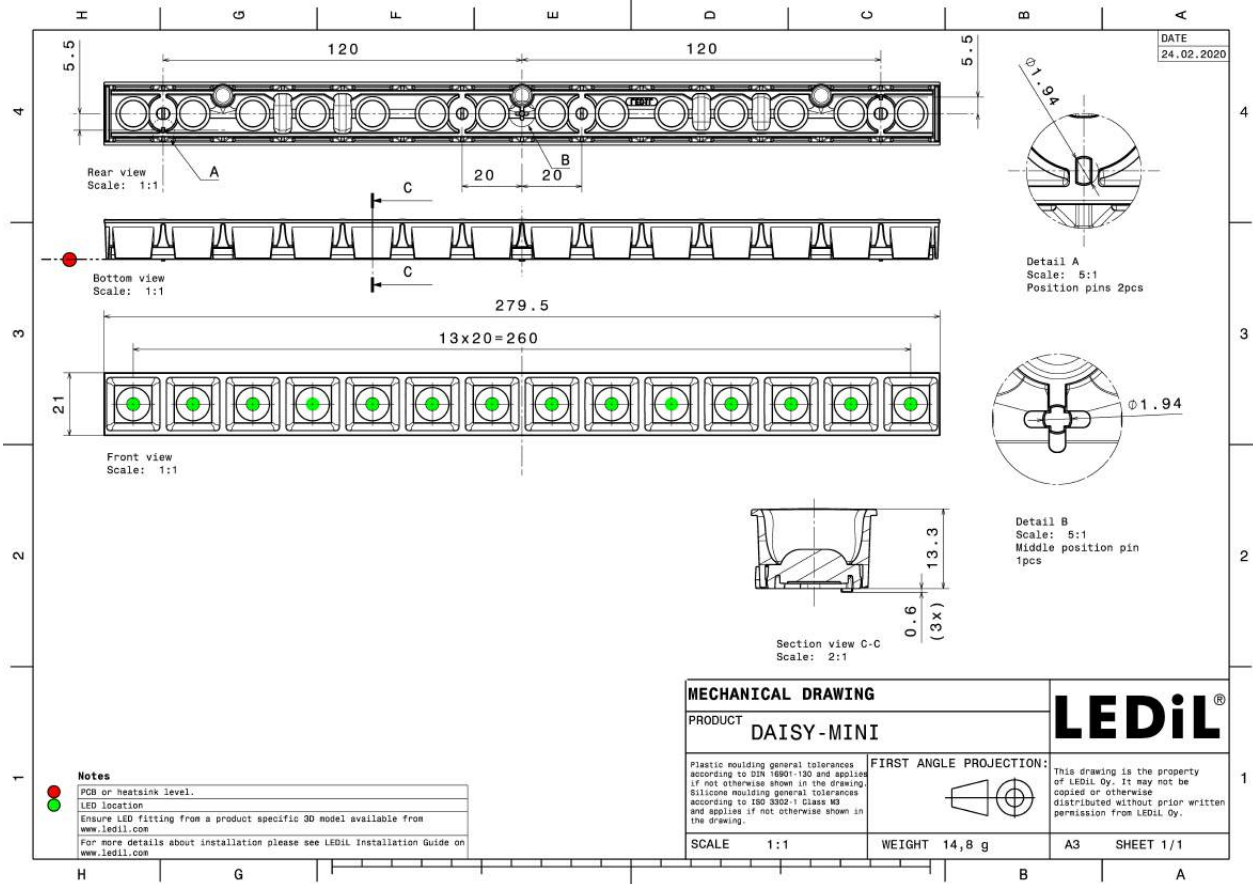


See also our general installation guide: www.ledil.com/installation_guide


OPTICAL RESULTS (MEASURED):



LED LED-Modul 279,65x20 mm 14 LEDs Mini Daisy
 FWHM / FWTM 55.0° / 69.0°
 Efficiency 83 %
 Peak intensity 1.2 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:
 F17028_DAISSY-MINI-SHD

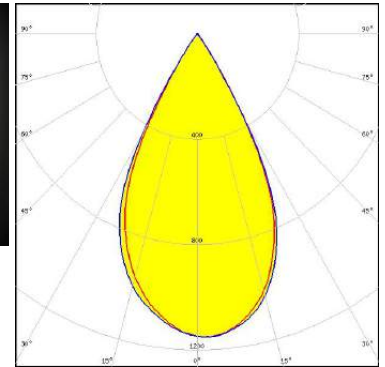

LED LED-Modul 279,65x20 mm 14 LEDs Mini Daisy
 FWHM / FWTM 55.0° / 69.0°
 Efficiency 83 %
 Peak intensity 1.2 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:
 F17034_DAISSY-MINI-SHD-MATT


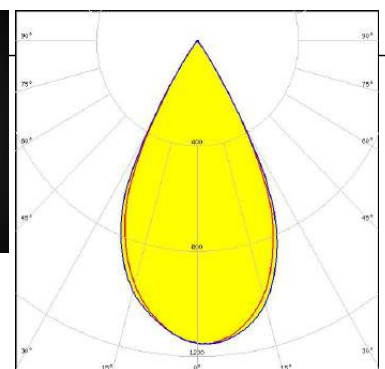


Light distribution files

Light distribution files



LED LED-Modul 279,65x20 mm 14 LEDs Mini Daisy
 FWHM / FWTM 55.0° / 71.0°
 Efficiency 93 %
 Peak intensity 1.2 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:
 F17033_DAISSY-MINI-SHD-WHT

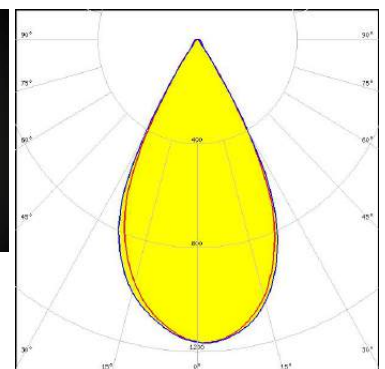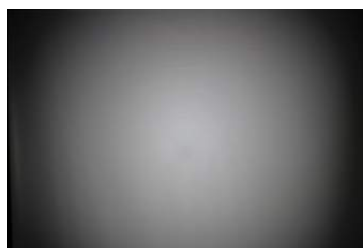


Light distribution files

OPTICAL RESULTS (MEASURED):





LED LED-Modul 279,65x20 mm 14 LEDs Mini Daisy
 FWHM / FWTM 55.0° / 70.0°
 Efficiency 93 %
 Peak intensity 1.2 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:
 F17465_DAISSY-MINI-SHD-WHT-MATT

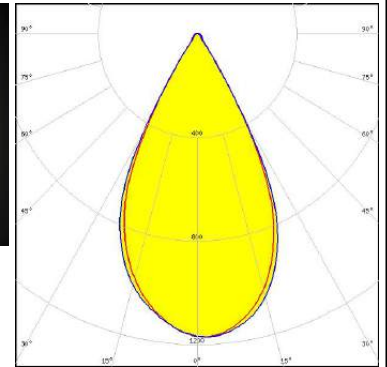

Light distribution files





LED LED-Modul 279,65x20 mm 14 LEDs TW Mini Daisy
 FWHM / FWTM 56.0° / 73.0°
 Efficiency 92 %
 Peak intensity 1.1 cd/lm
 LEDs/each optic 1
 Light colour/type Tunable White
 Required components:
 F17033_DAISSY-MINI-SHD-WHT

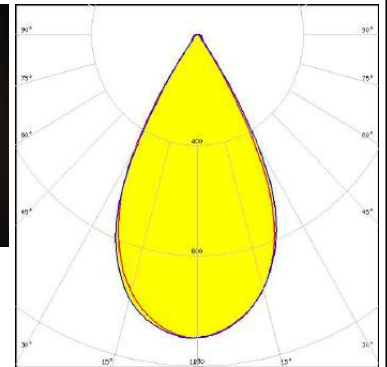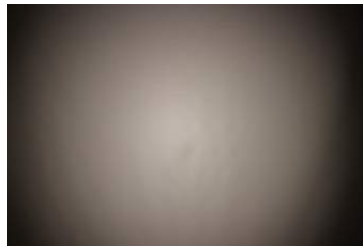

Light distribution files



LED LED-Modul 279,65x20 mm 14 LEDs TW Mini Daisy
 FWHM / FWTM 56.0° / 72.0°
 Efficiency 92 %
 Peak intensity 1.1 cd/lm
 LEDs/each optic 1
 Light colour/type Tunable White
 Required components:
 F17465_DAISSY-MINI-SHD-WHT-MATT

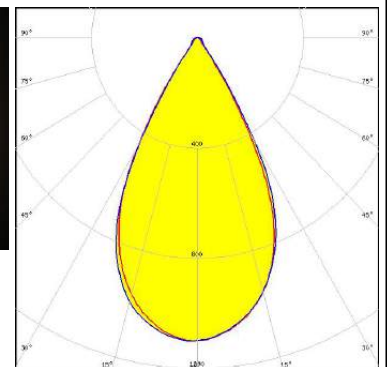
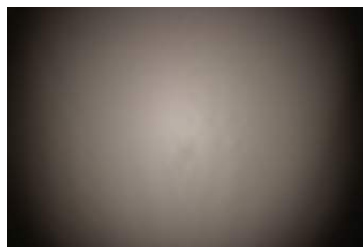


Light distribution files

OPTICAL RESULTS (MEASURED):





LED LED-Modul 279,65x20 mm 14 LEDs TW Mini Daisy
 FWHM / FWTM 56.0° / 71.0°
 Efficiency 82 %
 Peak intensity 1.1 cd/lm
 LEDs/each optic 1
 Light colour/type Tunable White
 Required components:
 F17028_DAISSY-MINI-SHD

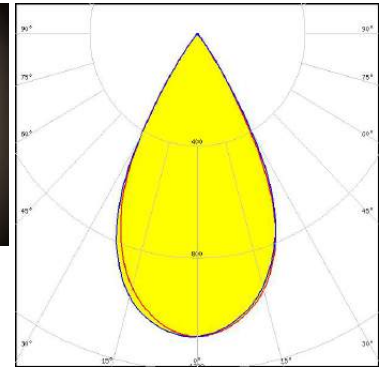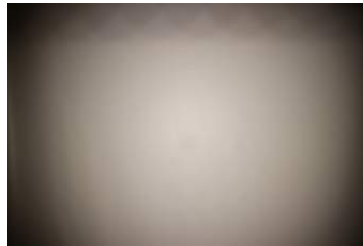

Light distribution files





LED LED-Modul 279,65x20 mm 14 LEDs TW Mini Daisy
 FWHM / FWTM 55.0° / 71.0°
 Efficiency 81 %
 Peak intensity 1.1 cd/lm
 LEDs/each optic 1
 Light colour/type Tunable White
 Required components:
 F17034_DAISSY-MINI-SHD-MATT

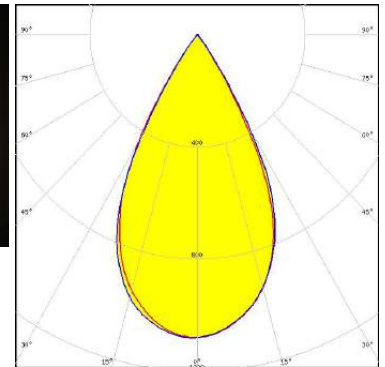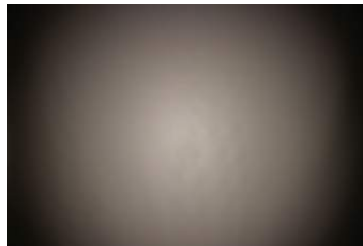

Light distribution files



LED LED-Modul 279,65x20 mm 14 LEDs TW Mini Daisy
 FWHM / FWTM 56.0° / 74.0°
 Efficiency 91 %
 Peak intensity 1.1 cd/lm
 LEDs/each optic 1
 Light colour/type Tunable White
 Required components:
 F17667_DAISSY-MINI-SHD-MET-MATT

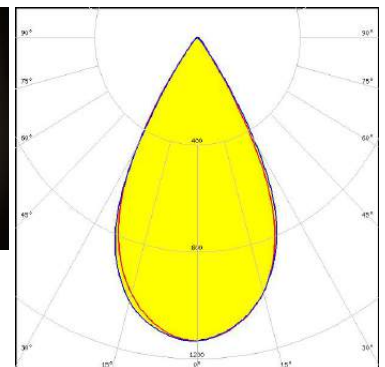
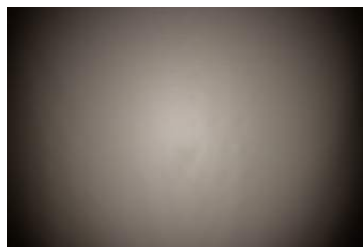


Light distribution files

OPTICAL RESULTS (MEASURED):




LED LED-Modul 279,65x20 mm 14 LEDs TW Mini Daisy
 FWHM / FWTM 58.0° / 73.0°
 Efficiency 92 %
 Peak intensity 1.1 cd/lm
 LEDs/each optic 1
 Light colour/type Tunable White
 Required components:
 F17666_DAISSY-MINI-SHD-MET

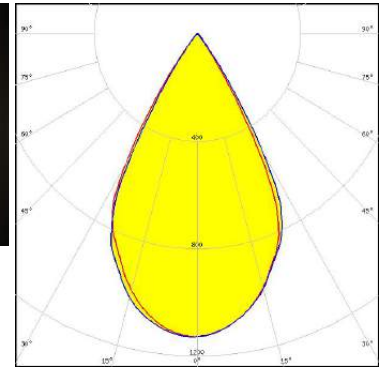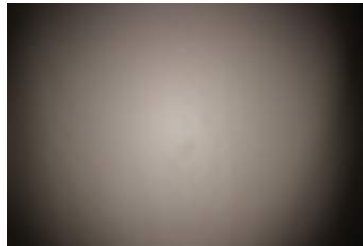

Light distribution files





LED Opticus Daisy Mini M L28W2
 FWHM / FWTM 55.0° / 70.0°
 Efficiency 82 %
 Peak intensity 1.1 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:
 F17034_DAISSY-MINI-SHD-MATT

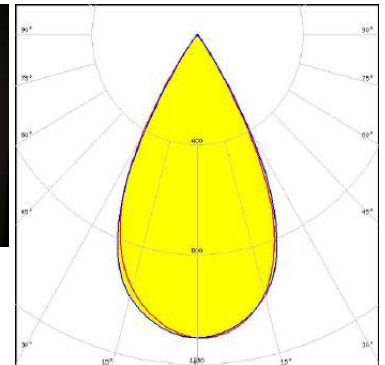

Light distribution files



LED LinLED 280x20mm 1100lm 8x0 2C 42V Opt G1
 FWHM / FWTM 58.0° / 81.0°
 Efficiency 77 %
 Peak intensity 0.9 cd/lm
 LEDs/each optic 2
 Light colour/type White
 Required components:
 F17034_DAISSY-MINI-SHD-MATT

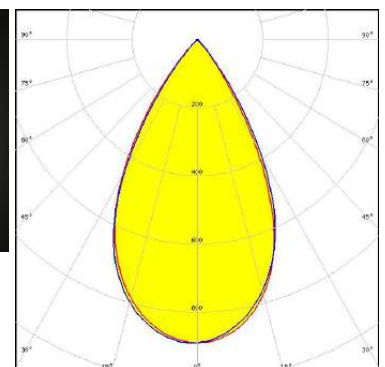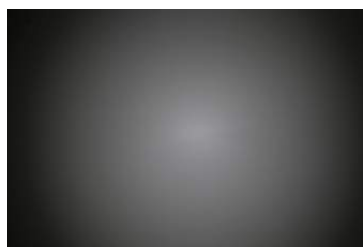


Light distribution files

OPTICAL RESULTS (MEASURED):

MST | *Your solutions*


LED LinLED 280x20mm 1100lm 8x0 2C 42V Opt G1
FWHM / FWTM 59.0° / 83.0°
Efficiency 90 %
Peak intensity 0.9 cd/lm
LEDs/each optic 2
Light colour/type White
Required components:
F17033_DAISSY-MINI-SHD-WHT

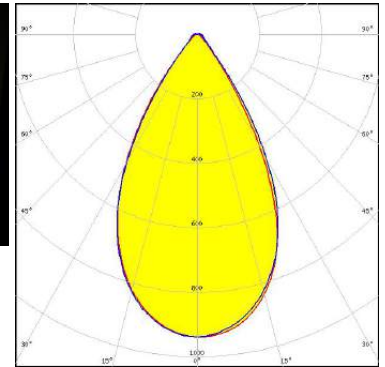

Light distribution files

MST | *Your solutions*


LED LinLED 280x20mm 1100lm 8x0 2C 42V Opt G1
FWHM / FWTM 58.0° / 82.0°
Efficiency 89 %
Peak intensity 0.9 cd/lm
LEDs/each optic 2
Light colour/type White
Required components:
F17465_DAISSY-MINI-SHD-WHT-MATT

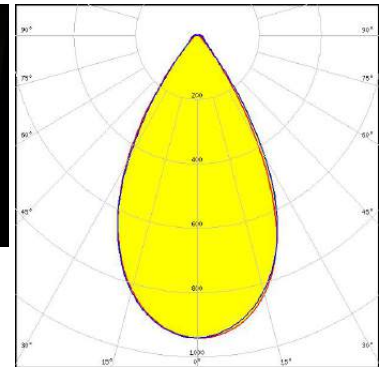

Light distribution files

MST | *Your solutions*

LED LinLED 280x20mm 1100lm 8x0 2C 42V Opt G1
FWHM / FWTM 59.0° / 83.0°
Efficiency 88 %
Peak intensity 1 cd/lm
LEDs/each optic 2
Light colour/type White
Required components:
F17667_DAISSY-MINI-SHD-MET-MATT

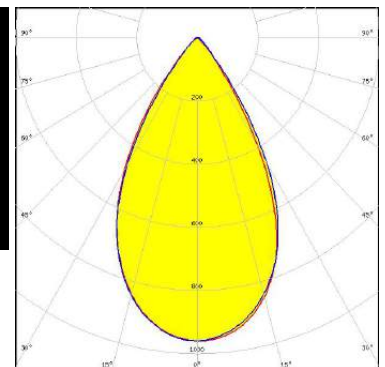


Light distribution files

OPTICAL RESULTS (MEASURED):

MST | Your solutions


LED LinLED 280x20mm 1100lm 8x0 2C 42V Opt G1
 FWHM / FWTM 59.0° / 84.0°
 Efficiency 90 %
 Peak intensity 0.9 cd/lm
 LEDs/each optic 2
 Light colour/type White
 Required components:
 F17033_DAISSY-MINI-SHD-WHT

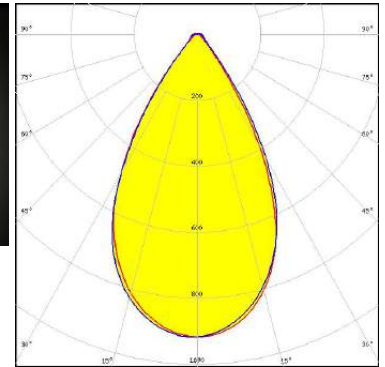

Light distribution files

MST | Your solutions


LED LinLED 280x20mm 1100lm 8x0 2C 42V Opt G1
 FWHM / FWTM 59.0° / 84.0°
 Efficiency 90 %
 Peak intensity 0.9 cd/lm
 LEDs/each optic 2
 Light colour/type White
 Required components:
 F17465_DAISSY-MINI-SHD-WHT-MATT

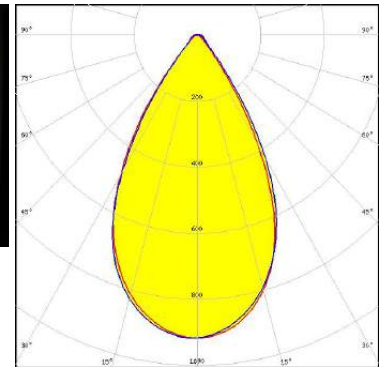

Light distribution files

MST | Your solutions

LED LinLED 280x20mm 1100lm 8x0 2C 42V Opt G1
 FWHM / FWTM 58.0° / 80.0°
 Efficiency 78 %
 Peak intensity 0.9 cd/lm
 LEDs/each optic 2
 Light colour/type White
 Required components:
 F17028_DAISSY-MINI-SHD

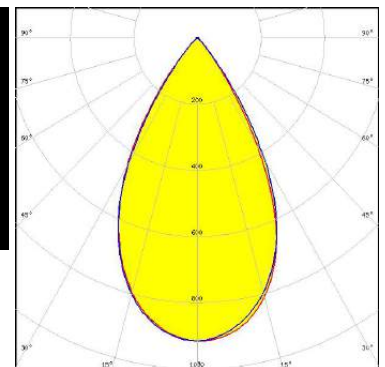


Light distribution files

OPTICAL RESULTS (MEASURED):

MST | *Your solutions*


LED LinLED 280x20mm 1100lm 8x0 2C 42V Opt G1
FWHM / FWTM 57.0° / 80.0°
Efficiency 78 %
Peak intensity 0.9 cd/lm
LEDs/each optic 2
Light colour/type White
Required components:
F17034_DAISSY-MINI-SHD-MATT

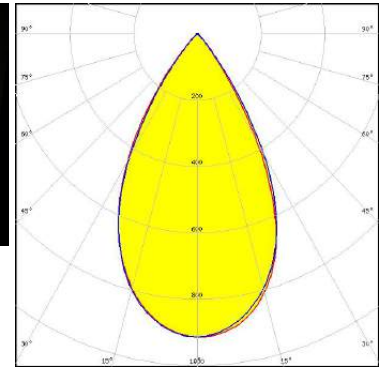

Light distribution files

MST | *Your solutions*


LED LinLED 280x20mm 1100lm 8x0 2C 42V Opt G1
FWHM / FWTM 60.0° / 82.0°
Efficiency 88 %
Peak intensity 1 cd/lm
LEDs/each optic 2
Light colour/type White
Required components:
F17666_DAISSY-MINI-SHD-MET

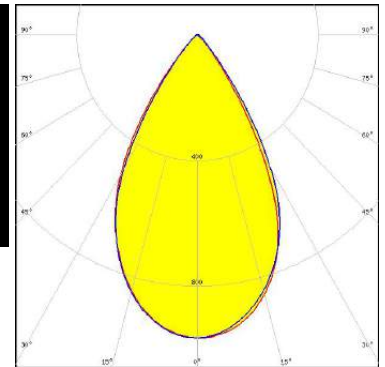

Light distribution files

MST | *Your solutions*

LED LinLED 280x20mm 1100lm 8x0 2C 42V Opt G1
FWHM / FWTM 58.0° / 81.0°
Efficiency 78 %
Peak intensity 0.9 cd/lm
LEDs/each optic 2
Light colour/type White
Required components:
F17028_DAISSY-MINI-SHD

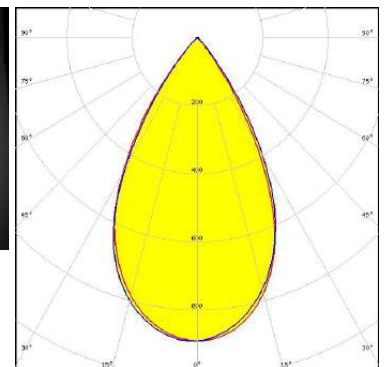


Light distribution files

OPTICAL RESULTS (MEASURED):

MST | *Your solutions*



LED LinLED 280x20mm 2x550lm 827-865 2x2C 42V DAISY-MINI-W
 FWHM / FWTM 60.0° / 93.0°
 Efficiency 88 %
 Peak intensity 0.8 cd/lm
 LEDs/each optic 1
 Light colour/type Tunable White
 Required components:
 F17033_DAISSY-MINI-SHD-WHT

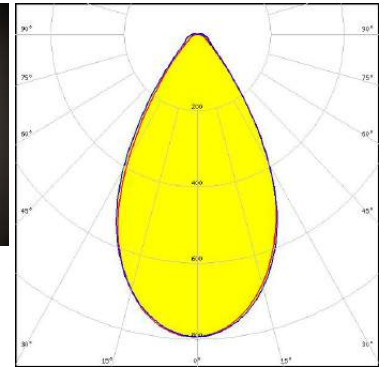

Light distribution files

MST | *Your solutions*



LED LinLED 280x20mm 2x550lm 827-865 2x2C 42V DAISY-MINI-W
 FWHM / FWTM 59.0° / 92.0°
 Efficiency 87 %
 Peak intensity 0.8 cd/lm
 LEDs/each optic 1
 Light colour/type Tunable White
 Required components:
 F17465_DAISSY-MINI-SHD-WHT-MATT

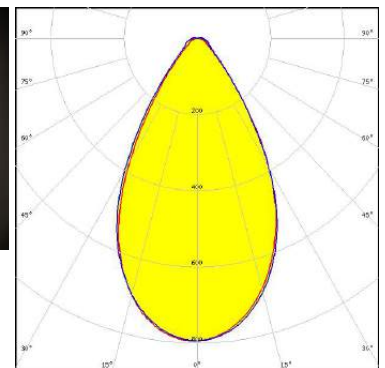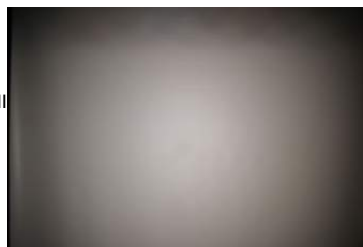

Light distribution files

MST | *Your solutions*

LED LinLED 280x20mm 2x550lm 827-865 2x2C 42V DAISY-MINI-W
 FWHM / FWTM 58.0° / 85.0°
 Efficiency 69 %
 Peak intensity 0.8 cd/lm
 LEDs/each optic 1
 Light colour/type Tunable White
 Required components:
 F17034_DAISSY-MINI-SHD-MATT

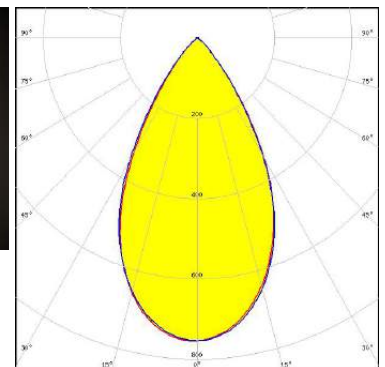
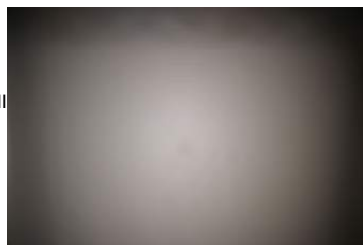


Light distribution files

OPTICAL RESULTS (MEASURED):





LED LinLED 280x20mm 2x550lm 827-865 2x2C 42V DAISY-MINI-W
 FWHM / FWTM 59.0° / 82.0°
 Efficiency 80 %
 Peak intensity 0.9 cd/lm
 LEDs/each optic 1
 Light colour/type Tunable White
 Required components:
 F17028_DAISSY-MINI-SHD

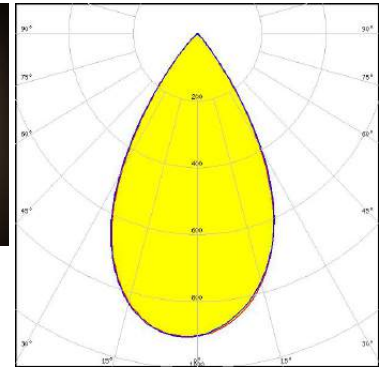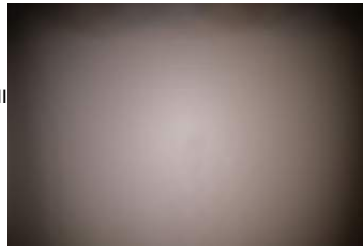

Light distribution files





LED NF2W757G-MT (Tunable White)
 FWHM / FWTM 56.0° / 74.0°
 Efficiency 91 %
 Peak intensity 1.1 cd/lm
 LEDs/each optic 1
 Light colour/type Tunable White
 Required components:
 F17667_DAISSY-MINI-SHD-MET-MATT

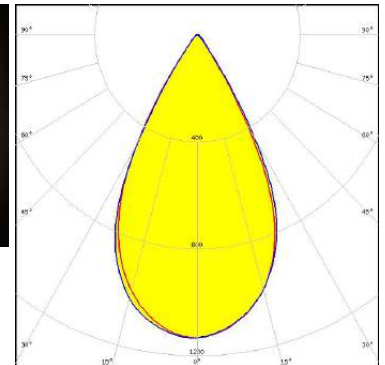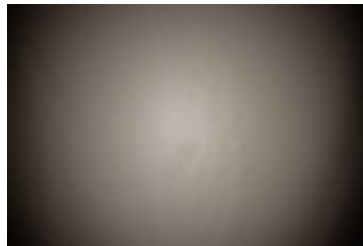

Light distribution files



LED NF2W757G-MT (Tunable White)
 FWHM / FWTM 56.0° / 71.0°
 Efficiency 82 %
 Peak intensity 1.1 cd/lm
 LEDs/each optic 1
 Light colour/type Tunable White
 Required components:
 F17028_DAISSY-MINI-SHD

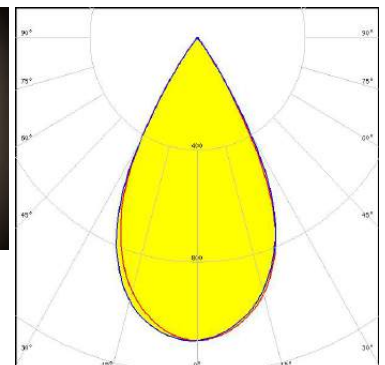
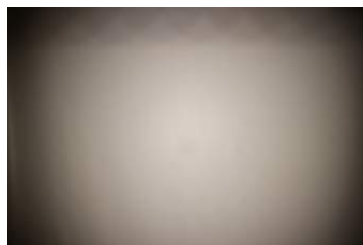


Light distribution files

OPTICAL RESULTS (MEASURED):





LED NF2W757G-MT (Tunable White)
 FWHM / FWTM 56.0° / 73.0°
 Efficiency 92 %
 Peak intensity 1.1 cd/lm
 LEDs/each optic 1
 Light colour/type Tunable White
 Required components:
 F17033_DAISSY-MINI-SHD-WHT

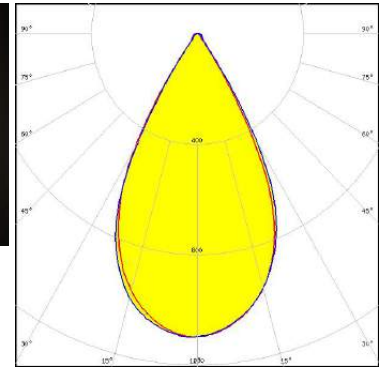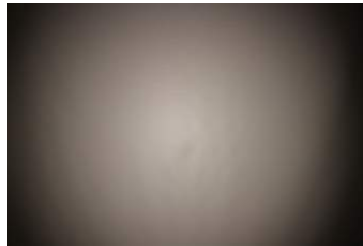

Light distribution files





LED NF2W757G-MT (Tunable White)
 FWHM / FWTM 58.0° / 73.0°
 Efficiency 92 %
 Peak intensity 1.1 cd/lm
 LEDs/each optic 1
 Light colour/type Tunable White
 Required components:
 F17666_DAISSY-MINI-SHD-MET

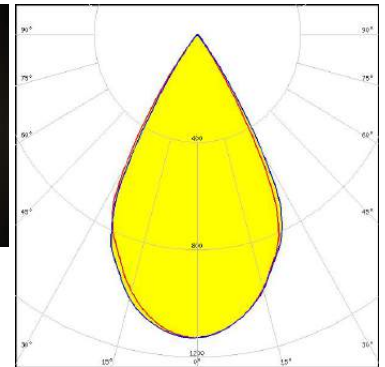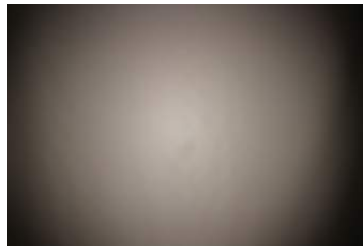

Light distribution files



LED NF2W757G-MT (Tunable White)
 FWHM / FWTM 55.0° / 71.0°
 Efficiency 81 %
 Peak intensity 1.1 cd/lm
 LEDs/each optic 1
 Light colour/type Tunable White
 Required components:
 F17034_DAISSY-MINI-SHD-MATT

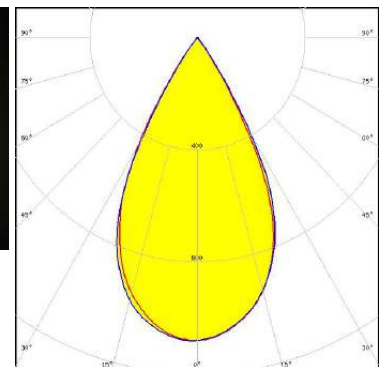
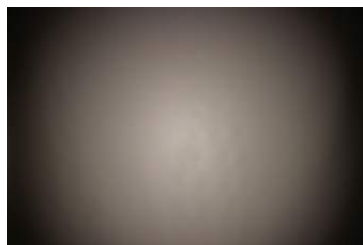


Light distribution files

OPTICAL RESULTS (MEASURED):




LED NF2W757G-MT (Tunable White)
 FWHM / FWTM 56.0° / 72.0°
 Efficiency 92 %
 Peak intensity 1.1 cd/lm
 LEDs/each optic 1
 Light colour/type Tunable White
 Required components:
 F17465_DAISSY-MINI-SHD-WHT-MATT

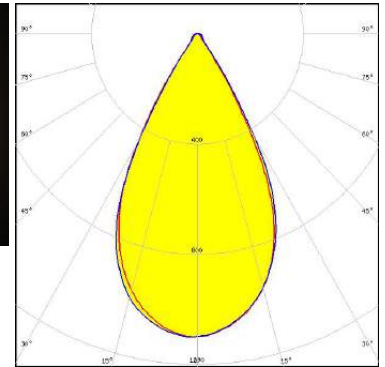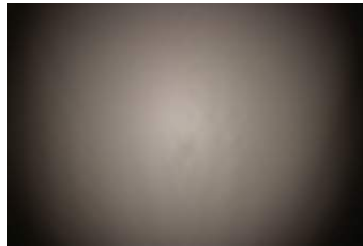

Light distribution files





LED NFSx757G
 FWHM / FWTM 55.0° / 69.0°
 Efficiency 83 %
 Peak intensity 1.2 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:
 F17028_DAISSY-MINI-SHD

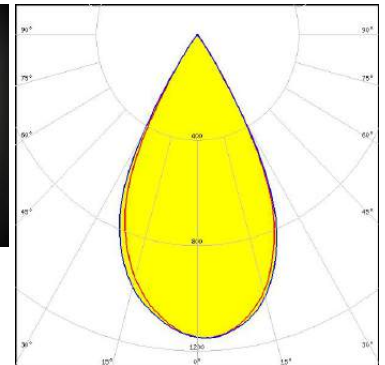

Light distribution files



LED NFSx757G
 FWHM / FWTM 54.0° / 69.0°
 Efficiency 83 %
 Peak intensity 1.2 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:
 F17034_DAISSY-MINI-SHD-MATT

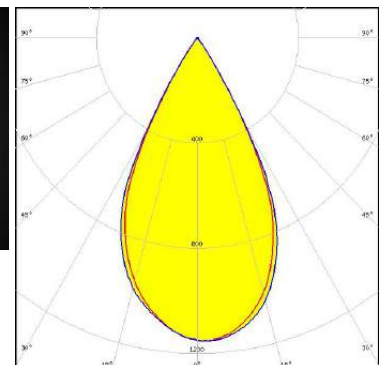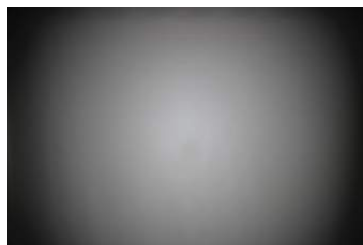


Light distribution files

OPTICAL RESULTS (MEASURED):




LED NFSx757G
FWHM / FWTM 55.0° / 70.0°
Efficiency 93 %
Peak intensity 1.2 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:
F17033_DAISSY-MINI-SHD-WHT

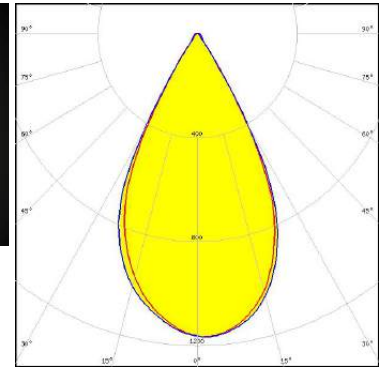

Light distribution files




LED NFSx757G
FWHM / FWTM 54.0° / 70.0°
Efficiency 93 %
Peak intensity 1.2 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:
F17465_DAISSY-MINI-SHD-WHT-MATT

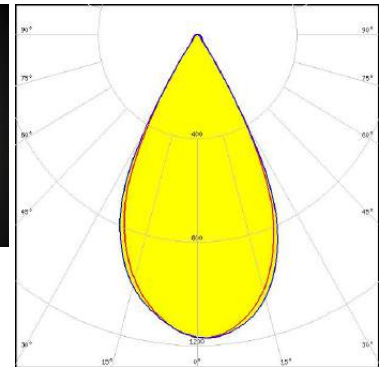

Light distribution files



LED LM28xB Series
FWHM / FWTM 55.0° / 70.0°
Efficiency 82 %
Peak intensity 1.1 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:
F17465_DAISSY-MINI-SHD-WHT-MATT

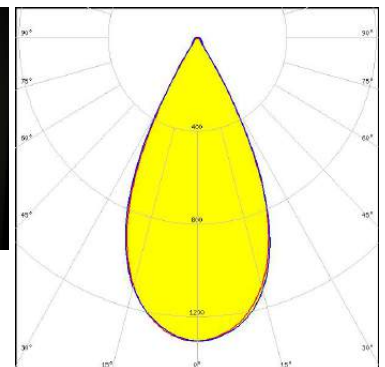


Light distribution files

OPTICAL RESULTS (MEASURED):

SAMSUNG


LED LM28xB Series
 FWHM / FWTM 51.0° / 67.0°
 Efficiency 83 %
 Peak intensity 1.3 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:
 F17028_DAISSY-MINI-SHD

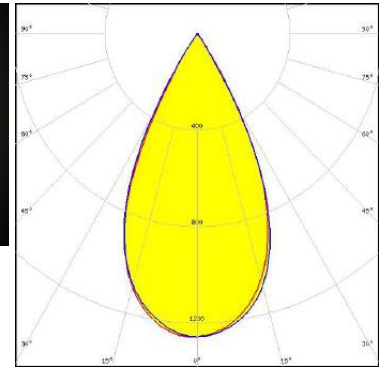

Light distribution files

SAMSUNG


LED LM28xB Series
 FWHM / FWTM 51.0° / 67.0°
 Efficiency 92 %
 Peak intensity 1.3 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:
 F17465_DAISSY-MINI-SHD-WHT-MATT

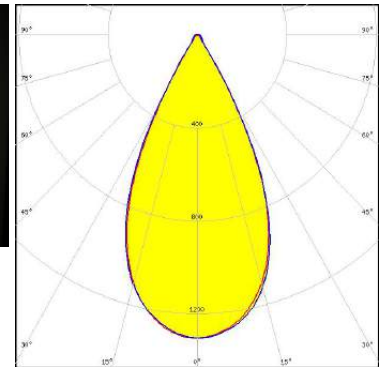

Light distribution files



LED PassivePAQ-L-1F20-SA2-1K-827-1.1K-865-3-TW
 FWHM / FWTM 64.0 + 53.0° / 84.0 + 70.0°
 Efficiency 78 %
 Peak intensity 0.9 cd/lm
 LEDs/each optic 2
 Light colour/type Tunable White
 Required components:
 F17028_DAISSY-MINI-SHD

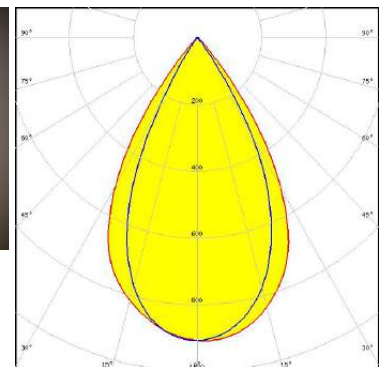


Light distribution files

OPTICAL RESULTS (MEASURED):




LED PassivePAQ-L-1F20-SA2-1K-827-1.1K-865-3-TW
 FWHM / FWTM 65.0 + 53.0° / 86.0 + 72.0°
 Efficiency 89 %
 Peak intensity 0.9 cd/lm
 LEDs/each optic 2
 Light colour/type Tunable White
 Required components:
 F17465_DAISSY-MINI-SHD-WHT-MATT

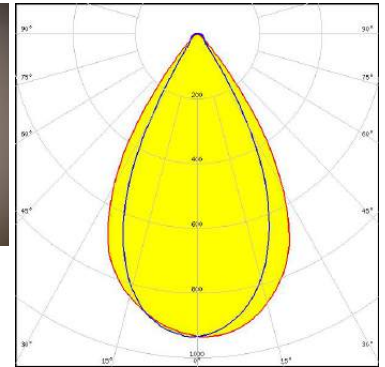

Light distribution files




LED PassivePAQ-L-1F20-SA2-1K-827-1.1K-865-3-TW
 FWHM / FWTM 53.0 + 65.0° / 73.0 + 87.0°
 Efficiency 88 %
 Peak intensity 1 cd/lm
 LEDs/each optic 2
 Light colour/type Tunable White
 Required components:
 F17667_DAISSY-MINI-SHD-MET-MATT

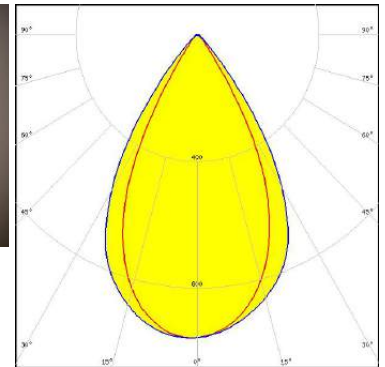

Light distribution files



LED PassivePAQ-L-1F20-SA2-1K-827-1.1K-865-3-TW
 FWHM / FWTM 64.0 + 52.0° / 84.0 + 70.0°
 Efficiency 77 %
 Peak intensity 0.9 cd/lm
 LEDs/each optic 2
 Light colour/type Tunable White
 Required components:
 F17033_DAISSY-MINI-SHD-WHT

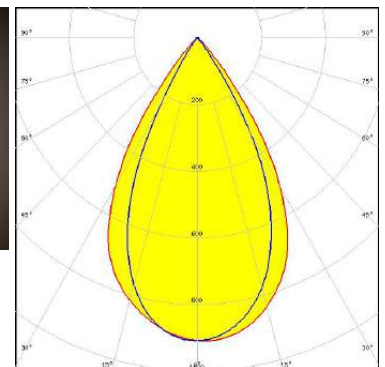


Light distribution files

OPTICAL RESULTS (MEASURED):




LED PassivePAQ-L-1F20-SA2-1K-827-1.1K-865-3-TW
 FWHM / FWTM 65.0 + 55.0° / 86.0 + 73.0°
 Efficiency 88 %
 Peak intensity 1 cd/lm
 LEDs/each optic 2
 Light colour/type Tunable White
 Required components:
 F17666_DAISSY-MINI-SHD-MET

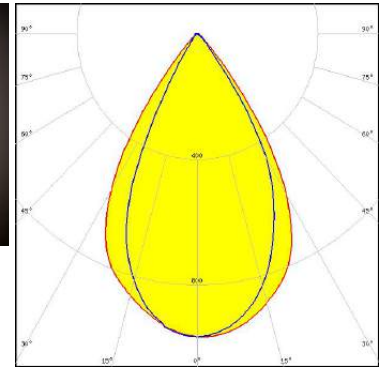

Light distribution files




LED PassivePAQ-L-1F20-SA2-2.4K-840-4
 FWHM / FWTM 57.0 + 58.0° / 80.0°
 Efficiency 78 %
 Peak intensity 0.9 cd/lm
 LEDs/each optic 2
 Light colour/type White
 Required components:
 F17028_DAISSY-MINI-SHD

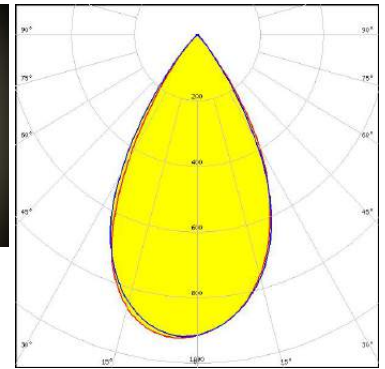

Light distribution files



LED PassivePAQ-L-1F20-SA2-2.4K-840-4
 FWHM / FWTM 57.0 + 58.0° / 80.0°
 Efficiency 78 %
 Peak intensity 0.9 cd/lm
 LEDs/each optic 2
 Light colour/type White
 Required components:
 F17034_DAISSY-MINI-SHD-MATT

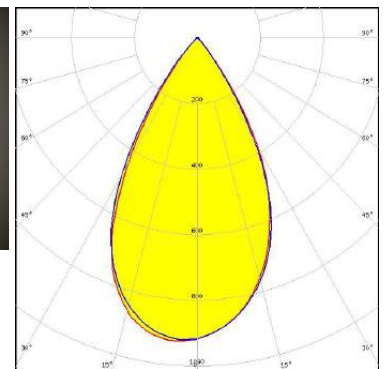


Light distribution files

OPTICAL RESULTS (MEASURED):




LED PassivePAQ-L-1F20-SA2-2.4K-840-4
 FWHM / FWTM 59.0 + 60.0° / 82.0 + 83.0°
 Efficiency 89 %
 Peak intensity 1 cd/lm
 LEDs/each optic 2
 Light colour/type White
 Required components:
 F17666_DAISSY-MINI-SHD-MET

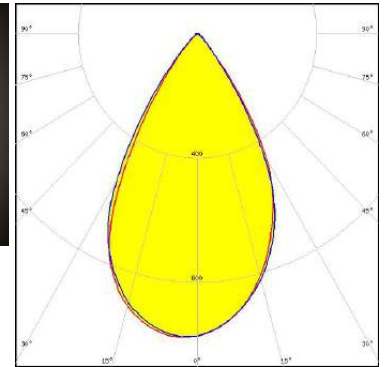

Light distribution files




LED PassivePAQ-L-1F20-SA2-2.4K-840-4
 FWHM / FWTM 58.0 + 59.0° / 82.0 + 83.0°
 Efficiency 91 %
 Peak intensity 1 cd/lm
 LEDs/each optic 2
 Light colour/type White
 Required components:
 F17033_DAISSY-MINI-SHD-WHT

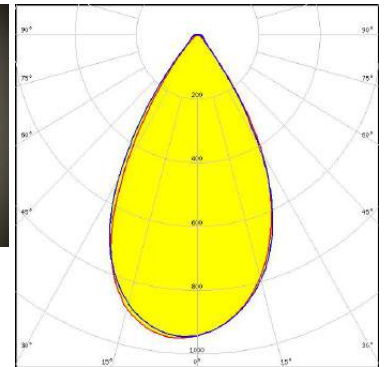

Light distribution files



LED PassivePAQ-L-1F20-SA2-2.4K-840-4
 FWHM / FWTM 58.0 + 59.0° / 82.0 + 83.0°
 Efficiency 90 %
 Peak intensity 1 cd/lm
 LEDs/each optic 2
 Light colour/type White
 Required components:
 F17465_DAISSY-MINI-SHD-WHT-MATT

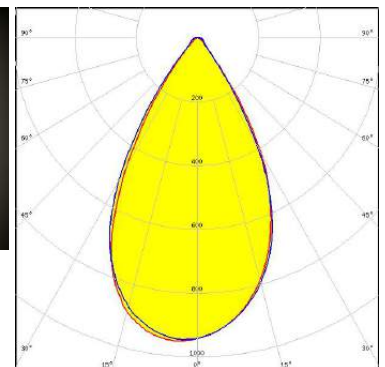


Light distribution files

OPTICAL RESULTS (MEASURED):





LED PassivePAQ-L-1F20-SA2-2.4K-840-4
 FWHM / FWTM 58.0 + 59.0° / 82.0 + 83.0°
 Efficiency 88 %
 Peak intensity 1 cd/lm
 LEDs/each optic 2
 Light colour/type White
 Required components:
 F17667_DAISSY-MINI-SHD-MET-MATT

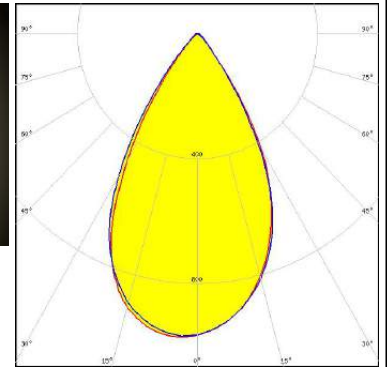

Light distribution files





LED PassivePAQ-L-1F20-SA3-1.3K-840-3-M2
 FWHM / FWTM 55.0° / 71.0°
 Efficiency 93 %
 Peak intensity 1.1 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:
 F17033_DAISSY-MINI-SHD-WHT

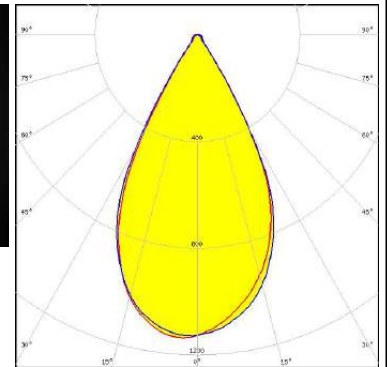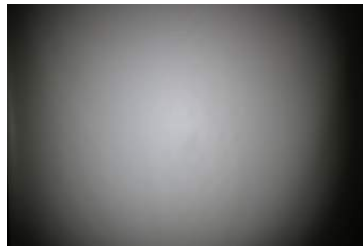

Light distribution files



LED PassivePAQ-L-1F20-SA3-1.3K-840-3-M2
 FWHM / FWTM 55.0° / 71.0°
 Efficiency 93 %
 Peak intensity 1.1 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:
 F17465_DAISSY-MINI-SHD-WHT-MATT

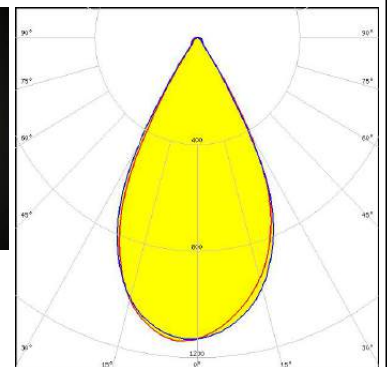
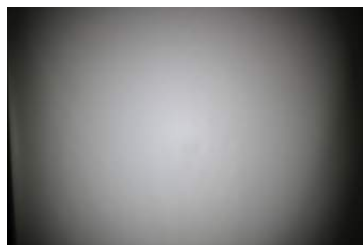


Light distribution files

OPTICAL RESULTS (MEASURED):





LED PassivePAQ-L-1F20-SA3-1.3K-840-3-M2
FWHM / FWTM 55.0° / 72.0°
Efficiency 92 %
Peak intensity 1.2 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:
F17667_DAISSY-MINI-SHD-MET-MATT

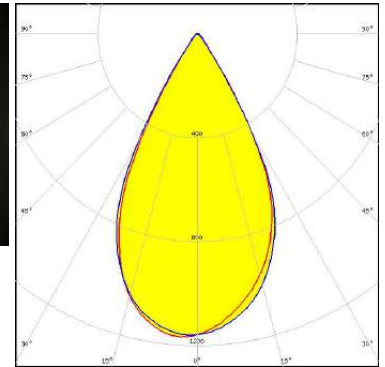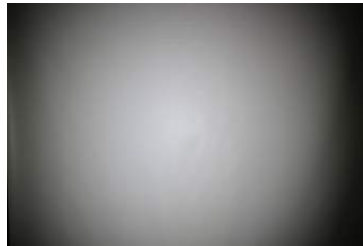

Light distribution files





LED PassivePAQ-L-1F20-SA3-1.3K-840-3-M2
FWHM / FWTM 55.0° / 70.0°
Efficiency 82 %
Peak intensity 1.1 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:
F17028_DAISSY-MINI-SHD

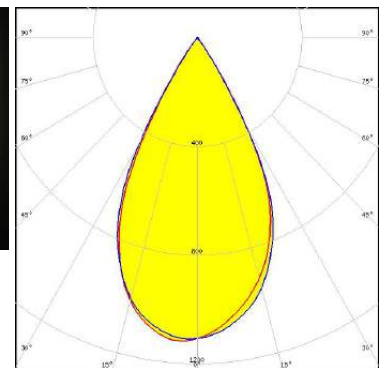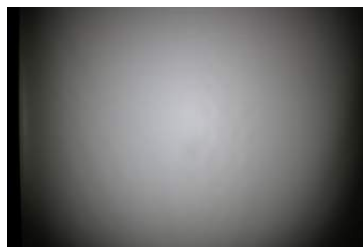

Light distribution files



LED PassivePAQ-L-1F20-SA3-1.3K-840-3-M2
FWHM / FWTM 55.0° / 70.0°
Efficiency 82 %
Peak intensity 1.1 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:
F17034_DAISSY-MINI-SHD-MATT

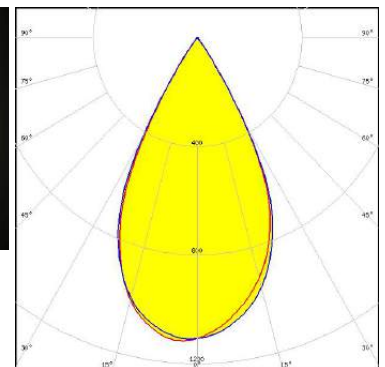
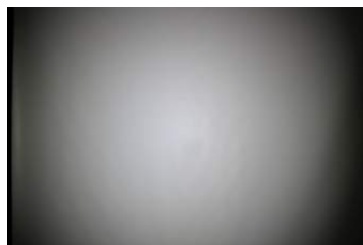


Light distribution files

OPTICAL RESULTS (MEASURED):




LED PassivePAQ-L-1F20-SA3-1.3K-840-3-M2
 FWHM / FWTM 57.0° / 72.0°
 Efficiency 92 %
 Peak intensity 1.2 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:
 F17666_DAISSY-MINI-SHD-MET

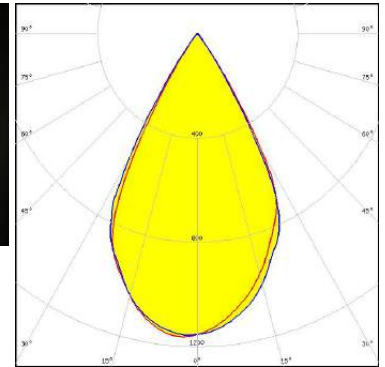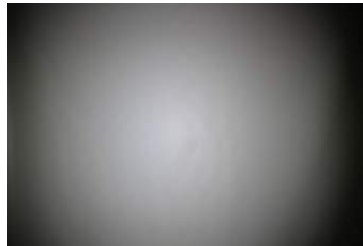

Light distribution files

TRIDONIC


LED LLE 20x280mm 750lm 827-865 LV MD ADV1
 FWHM / FWTM 58.0° / 81.0°
 Efficiency 78 %
 Peak intensity 0.9 cd/lm
 LEDs/each optic 2
 Light colour/type Tunable White
 Required components:
 F17028_DAISSY-MINI-SHD

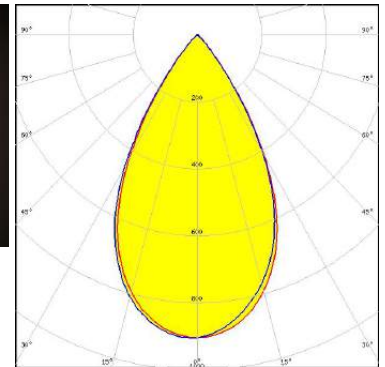

Light distribution files

TRIDONIC

LED LLE 20x280mm 750lm 840 LV MD ADV1
 FWHM / FWTM 58.0° / 81.0°
 Efficiency 78 %
 Peak intensity 0.9 cd/lm
 LEDs/each optic 2
 Light colour/type White
 Required components:
 F17028_DAISSY-MINI-SHD

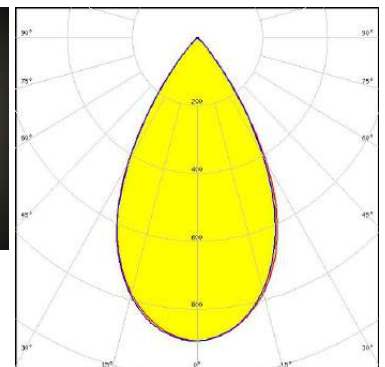


Light distribution files

OPTICAL RESULTS (MEASURED):

TRIDONIC


LED LLE 20x280mm 750lm 840 LV MD ADV1
FWHM / FWTM 58.0° / 81.0°
Efficiency 77 %
Peak intensity 0.9 cd/lm
LEDs/each optic 2
Light colour/type White
Required components:
F17034_DAISSY-MINI-SHD-MATT

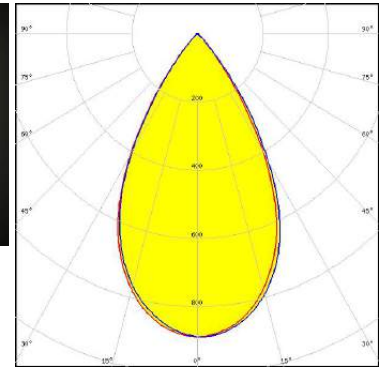

Light distribution files

TRIDONIC



LED LLE 20x280mm 750lm 840 LV MD ADV1
FWHM / FWTM 60.0° / 84.0°
Efficiency 89 %
Peak intensity 0.9 cd/lm
LEDs/each optic 2
Light colour/type White
Required components:
F17666_DAISSY-MINI-SHD-MET

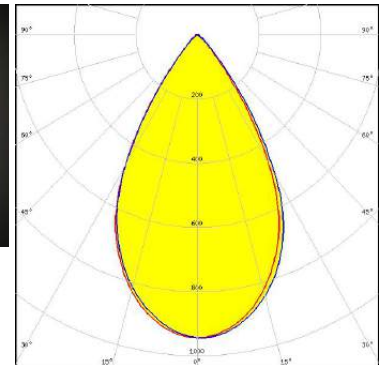

Light distribution files

TRIDONIC

LED LLE 20x280mm 750lm 840 LV MD ADV1
FWHM / FWTM 60.0° / 85.0°
Efficiency 90 %
Peak intensity 0.9 cd/lm
LEDs/each optic 2
Light colour/type White
Required components:
F17033_DAISSY-MINI-SHD-WHT

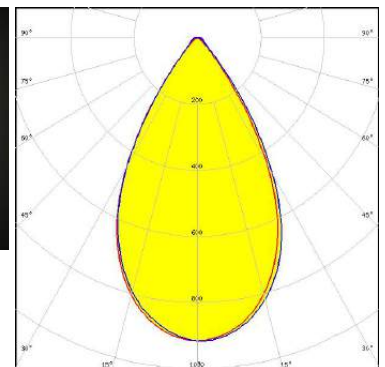
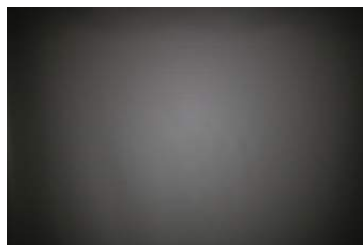


Light distribution files

OPTICAL RESULTS (MEASURED):

TRIDONIC


LED LLE 20x280mm 750lm 840 LV MD ADV1
FWHM / FWTM 59.0° / 85.0°
Efficiency 90 %
Peak intensity 0.9 cd/lm
LEDs/each optic 2
Light colour/type White
Required components:
F17465_DAISSY-MINI-SHD-WHT-MATT

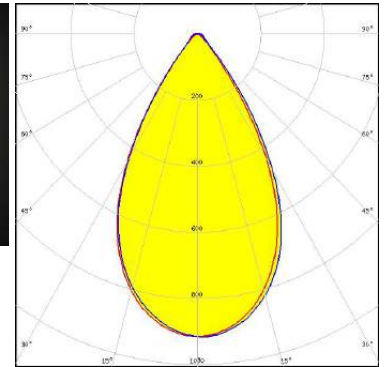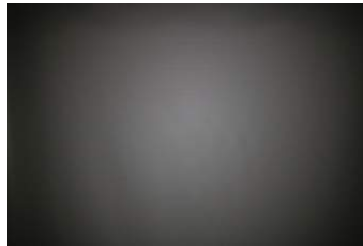

Light distribution files

TRIDONIC

LED LLE 20x280mm 750lm 840 LV MD ADV1
FWHM / FWTM 60.0° / 85.0°
Efficiency 88 %
Peak intensity 0.9 cd/lm
LEDs/each optic 2
Light colour/type White
Required components:
F17667_DAISSY-MINI-SHD-MET-MATT

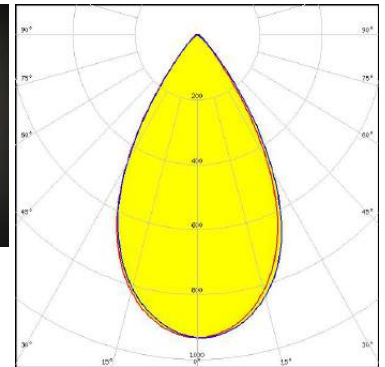


Light distribution files


OPTICAL RESULTS (SIMULATED):




LED XQ-E HI
FWHM / FWTM 57.0° / 69.0°
Efficiency 88 %
Peak intensity 1.2 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:
 F17666_DAISSY-MINI-SHD-MET

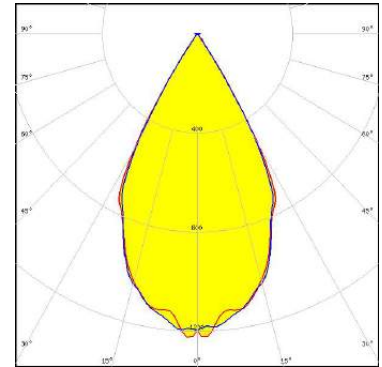

LED XQ-E HI
FWHM / FWTM 53.0° / 68.0°
Efficiency 78 %
Peak intensity 1.2 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:
 F17034_DAISSY-MINI-SHD-MATT

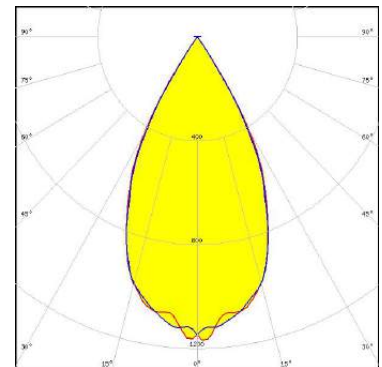


LED LUXEON 2835 Line
FWHM / FWTM 54.0° / 70.0°
Efficiency 86 %
Peak intensity 1.2 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:
 F17034_DAISSY-MINI-SHD-MATT

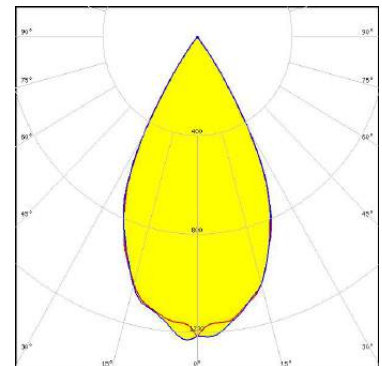


OPTICAL RESULTS (SIMULATED):




LED LUXEON 5050 HE
FWHM / FWTM 56.0° / 78.0°
Efficiency 90 %
Peak intensity 1.1 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:
F17033_DAISY-MINI-SHD-WHT

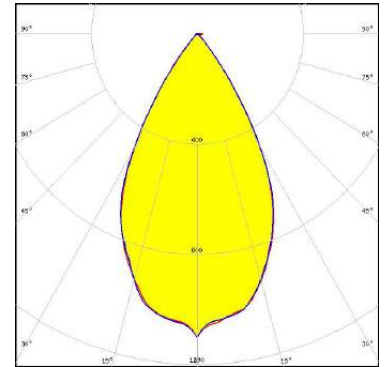

LED LUXEON 5050 HE
FWHM / FWTM 56.0° / 78.0°
Efficiency 84 %
Peak intensity 1 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:
F17028_DAISY-MINI-SHD

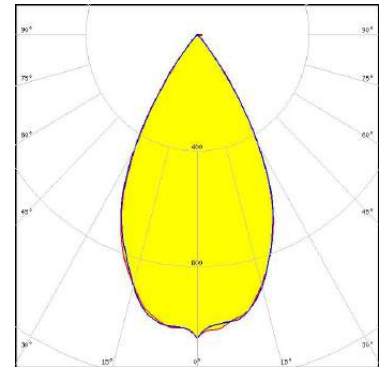


LED LUXEON HL1Z
FWHM / FWTM 50.0° / 64.0°
Efficiency 82 %
Peak intensity 1.3 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:
F17028_DAISY-MINI-SHD

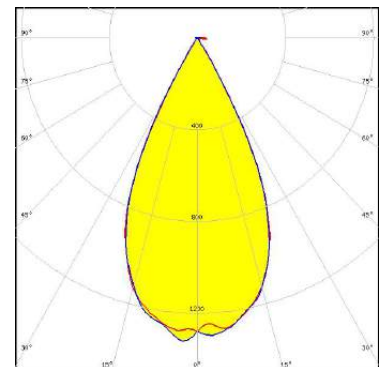


OPTICAL RESULTS (SIMULATED):




LED NF2x757G
 FWHM / FWTM 58.0° / 82.0°
 Efficiency 81 %
 Peak intensity 1.1 cd/lm
 LEDs/each optic 2
 Light colour/type White
 Required components:

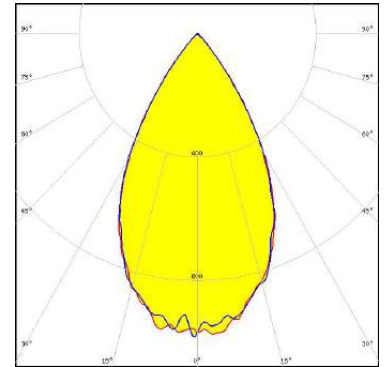

LED NFSWE11A
 FWHM / FWTM 50.0° / 66.0°
 Efficiency 77 %
 Peak intensity 1.3 cd/lm
 LEDs/each optic 4
 Light colour/type White
 Required components:
 F17028_DAISSY-MINI-SHD

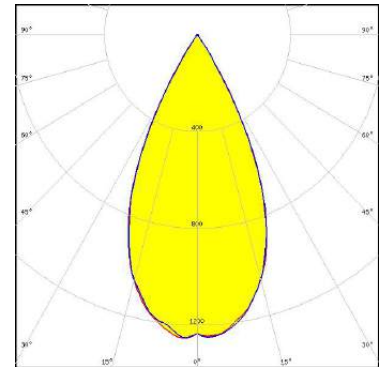


LED Duris E 2835
 FWHM / FWTM 56.0° / 70.0°
 Efficiency 92 %
 Peak intensity 1.3 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:
 F17028_DAISSY-MINI-SHD

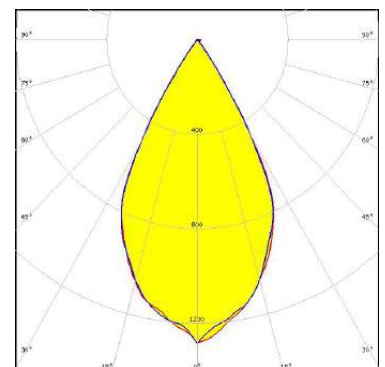

OPTICAL RESULTS (SIMULATED):


SAMSUNG

LED LM28xB Series
FWHM / FWTM 56.0° / 80.0°
Efficiency 80 %
Peak intensity 1.1 cd/lm
LEDs/each optic 2
Light colour/type White
Required components:

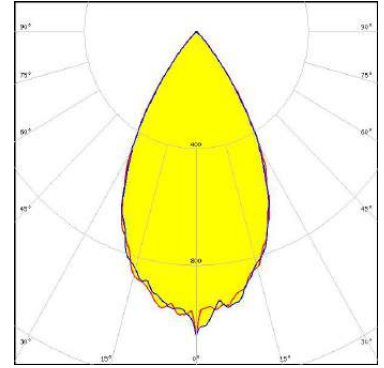


SAMSUNG

LED LM28xB Series
FWHM / FWTM 76.0° / 101.0°
Efficiency 75 %
Peak intensity 0.5 cd/lm
LEDs/each optic 2
Light colour/type White
Required components:
F17667_DAISSY-MINI-SHD-MET-MATT

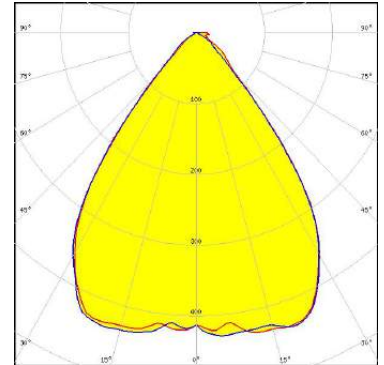

SAMSUNG


LED LM28xB Series
FWHM / FWTM 57.0° / 80.0°
Efficiency 81 %
Peak intensity 1.1 cd/lm
LEDs/each optic 2
Light colour/type White
Required components:

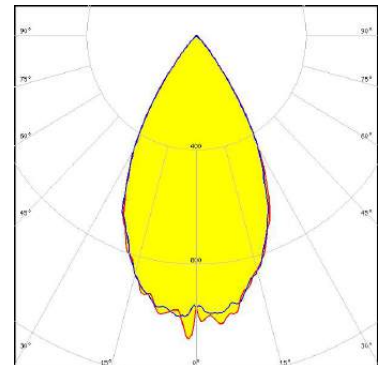

OPTICAL RESULTS (SIMULATED):


SAMSUNG

LED LM28xB Series
FWHM / FWTM 55.0° / 69.0°
Efficiency 91 %
Peak intensity 1.3 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:
F17666_DAISSY-MINI-SHD-MET

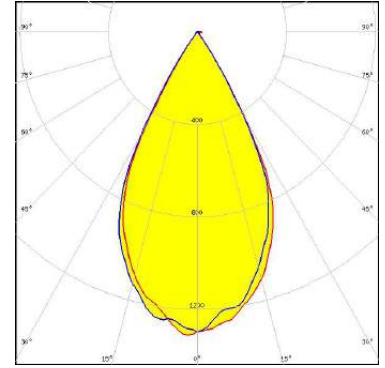


SAMSUNG

LED LM28xB Series
FWHM / FWTM 76.0° / 101.0°
Efficiency 75 %
Peak intensity 0.5 cd/lm
LEDs/each optic 2
Light colour/type White
Required components:
F17666_DAISSY-MINI-SHD-MET

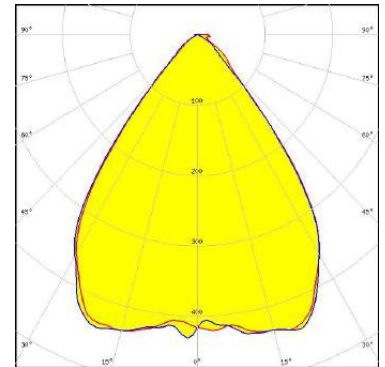

SAMSUNG


LED LM28xB Series
FWHM / FWTM 68.0° / 87.0°
Efficiency 73 %
Peak intensity 0.6 cd/lm
LEDs/each optic 4
Light colour/type White
Required components:
F17028_DAISSY-MINI-SHD

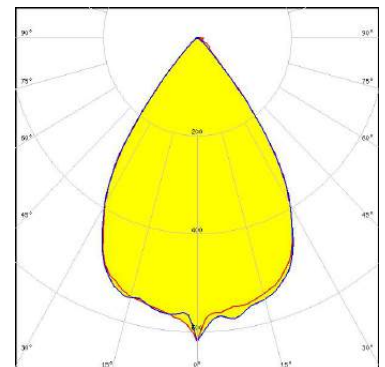

OPTICAL RESULTS (SIMULATED):


SAMSUNG

LED LM302D
FWHM / FWTM 54.0° / 70.0°
Efficiency 89 %
Peak intensity 1.3 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:
F17465_DAISY-MINI-SHD-WHT-MATT

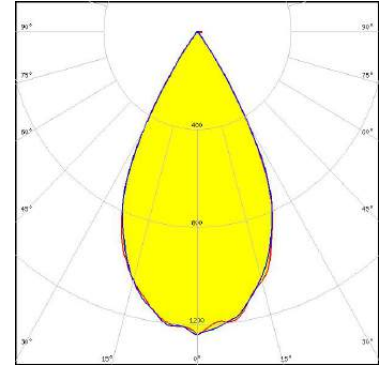


SAMSUNG

LED LM302D
FWHM / FWTM 54.0° / 70.0°
Efficiency 84 %
Peak intensity 1.2 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:
F17028_DAISY-MINI-SHD

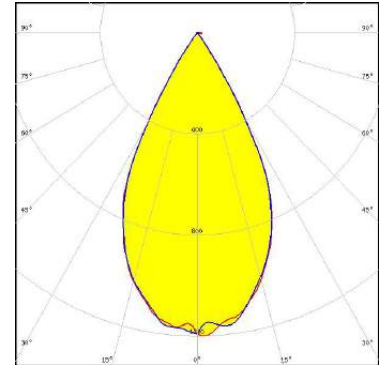

SAMSUNG

LED LM302Z plus
FWHM / FWTM 55.0° / 70.0°
Efficiency 91 %
Peak intensity 1.3 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:
F17028_DAISY-MINI-SHD

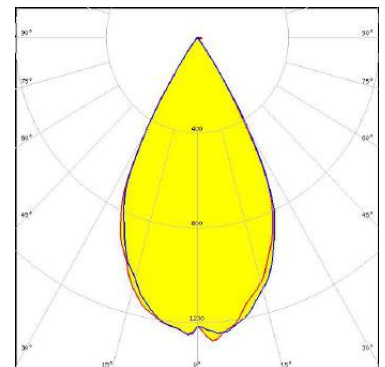


OPTICAL RESULTS (SIMULATED):

SAMSUNG

LED LM302Z plus
FWHM / FWTM 55.0° / 70.0°
Efficiency 91 %
Peak intensity 1.3 cd/lm
LEDs/each optic 1
Light colour/type White

Required components:

F17666_DAISSY-MINI-SHD-MET

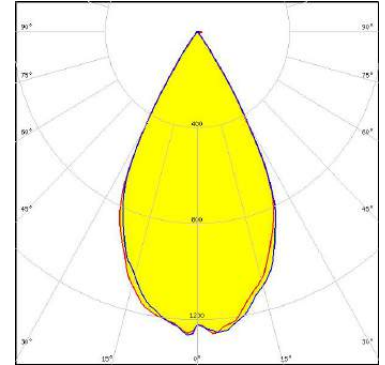


SAMSUNG

LED LM561B Plus
FWHM / FWTM 55.0° / 70.0°
Efficiency 92 %
Peak intensity 1.3 cd/lm
LEDs/each optic 1
Light colour/type White

Required components:


F17666_DAISSY-MINI-SHD-MET

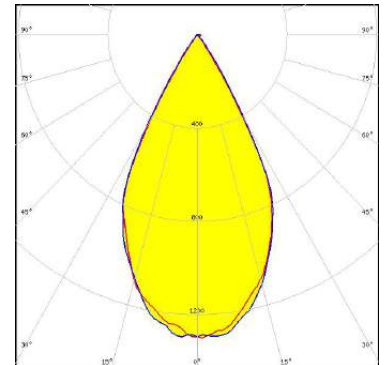


SAMSUNG

LED LM561B Plus
FWHM / FWTM 55.0° / 80.0°
Efficiency 81 %
Peak intensity 1.1 cd/lm
LEDs/each optic 2
Light colour/type White

Required components:

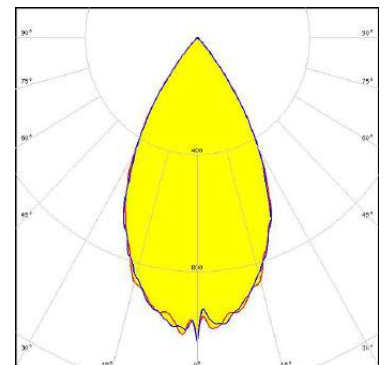

OPTICAL RESULTS (SIMULATED):

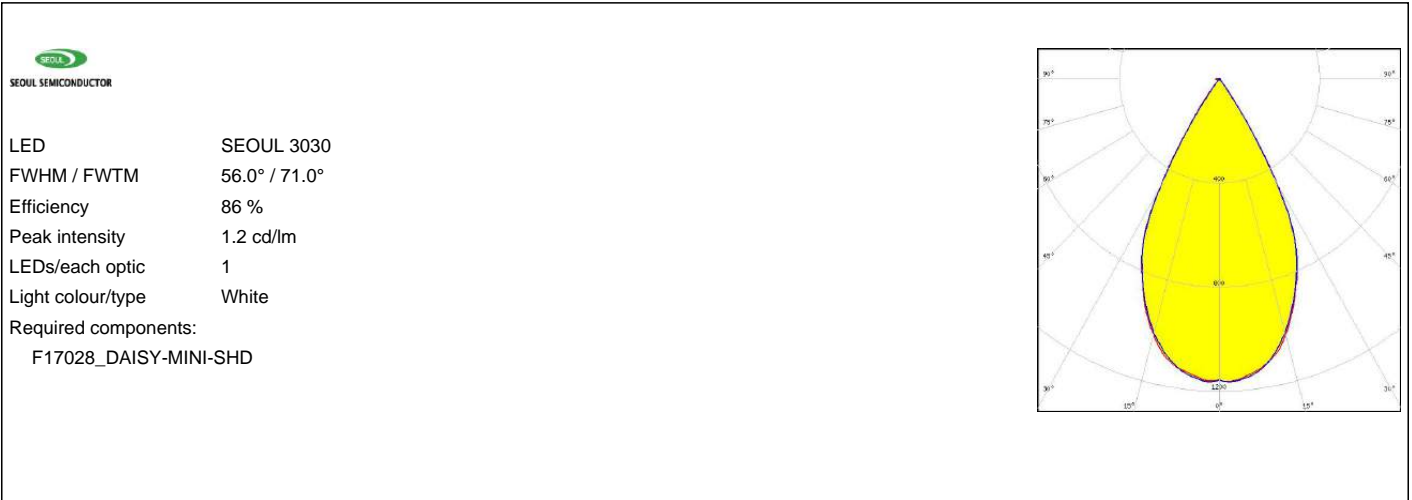

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13
FI-24240 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Ledil Optics Technology (Shenzhen) Co., Ltd.

405 , Block B
Casic Motor Building
Shenzhen 518057
P.R.CHINA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Salo, Finland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)