

AMY-70-M-C

~24° medium beam. Assembly with holder C compatible with LEDiL HEKLA. Black version.

SPECIFICATION:

Dimensions	Ø 69.9 mm
Height	16.6 mm
Fastening	socket
ROHS compliant	yes 🕕



MATERIALS:

Component	Туре	Material	Colour	Finish
AMY-70-M	Single lens	PMMA		
AMY-70-HI D-C	Holder	PC	black	


ORDERING INFORMATION:

Component	Qty in box	MOQ	MPQ	Box weight (kg)
CP17783_AMY-70-M-C	210	210	15	8.7

» Box size: 480 x 280 x 300 mm




PRODUCT CP17783_AMY-70-M-C

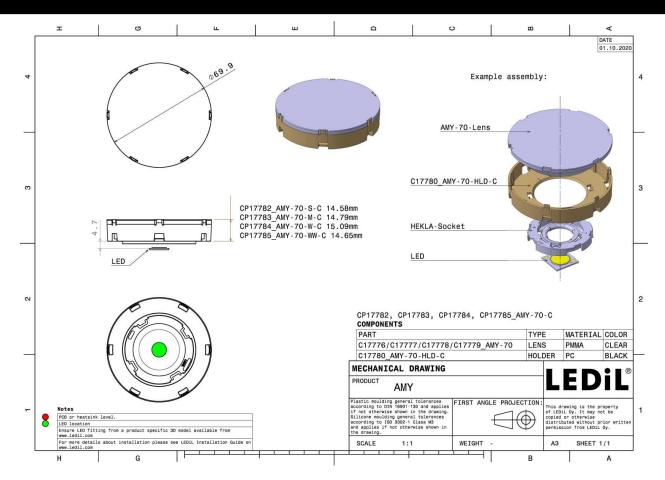

See also our general installation guide: www.ledil.com/installation_guide



OPTICAL RESULTS (MEASURED):

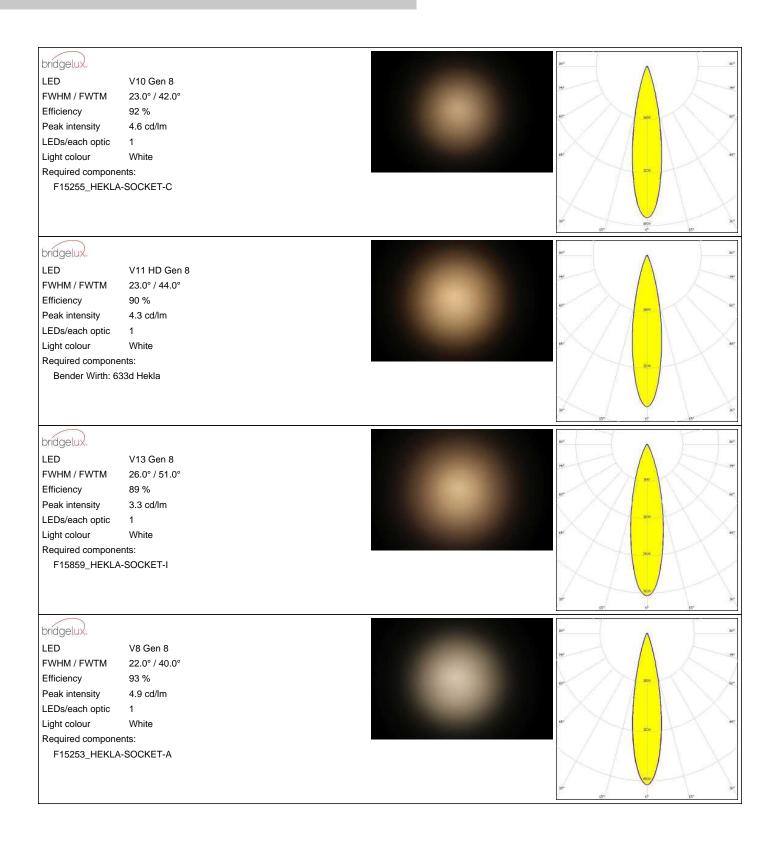

3/16




OPTICAL RESULTS (MEASURED):

CITIZEN

LED CLL02x/CLU02x (LES10)


FWHM / FWTM 22.0° / 41.0°
Efficiency 90 %
Peak intensity 4.8 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F17435_HEKLA-G2-C

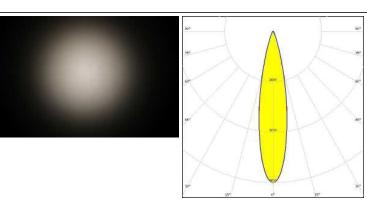

CREE + LED

LED CMU15xx
FWHM / FWTM 26.0° / 51.0°
Efficiency 88 %
Peak intensity 3.2 cd/lm
LEDs/each optic 1
Light colour White
Required components:





DESCRIPTION LUMILEDS


F17438_HEKLA-G2-I

LED LUXEON Fusion 12-up (20x24)

FWHM / FWTM 22.0° / 41.0°
Efficiency 84 %
Peak intensity 4.3 cd/lm
LEDs/each optic 12
Light colour White
Required components:

C16142_HEKLA-SOCKET-K F18158_HEKLA-RZ-LENS Bender Wirth: 442 Typ L8






DESCRIPTION LUMILEDS

LED LUXEON Fusion 21-up (20x24)

FWHM / FWTM 23.0° / 42.0°
Efficiency 82 %
Peak intensity 4 cd/lm
LEDs/each optic 21
Light colour White
Required components:

C16142_HEKLA-SOCKET-K F18158_HEKLA-RZ-LENS Bender Wirth: 442 Typ L8







OPTICAL RESULTS (MEASURED):




LED LUXEON Fusion 27-up (20x24)

FWHM / FWTM 26.0° / 48.0°
Efficiency 82 %
Peak intensity 3.1 cd/lm
LEDs/each optic 27
Light colour White
Required components:

C16142_HEKLA-SOCKET-K F18158_HEKLA-RZ-LENS Bender Wirth: 442 Typ L8





ELUMINUS

LED CTM-14 (Tunable White) Gen2


FWHM / FWTM 24.5° / 48.0° Efficiency 89 % Peak intensity 3.5 cd/lm LEDs/each optic 1

Light colour Tunable White

Required components:

C16142_HEKLA-SOCKET-K Bender Wirth: 442 Typ L8





SAMSUNG

LED LC016D / LC019D / LC026D / LC033D

FWHM / FWTM 27.0° / 53.0°

Efficiency 90 %

Peak intensity 3.1 cd/lm


LEDs/each optic 1

Light colour White

Required components:

F15859_HEKLA-SOCKET-I





5/16



bridgelux


LED V13 Gen7 FWHM / FWTM 24.0° / 51.0°

Efficiency 92 %

Peak intensity 3.8 cd/lm LEDs/each optic 1

Light colour White

Required components:



bridgelux


LED V18 Gen 8

FWHM / FWTM 32.0° / 62.0 + 60.0°

Efficiency 86 %
Peak intensity 2.4 cd/lm
LEDs/each optic 1
Light colour White

Required components:

Bender Wirth: 639b Hekla XL



bridgelux


LED V3 HD Gen 8 FWHM / FWTM 21.0 + 22.0° / 32.0°

Efficiency 94 %
Peak intensity 7.1 cd/lm
LEDs/each optic 1

Light colour White

Required components:

F15253_HEKLA-SOCKET-A




bridgelux.

LED V3 HD Gen 8 FC FWHM / FWTM 22.0 + 21.0° / 32.0°

Efficiency 93 %
Peak intensity 7.1 cd/lm
LEDs/each optic 1
Light colour White

Required components:

F15255_HEKLA-SOCKET-C



Published: 07/07/2021




bridgelux

LED V4 HD Gen 8 FWHM / FWTM 22.0° / 33.0 + 34.0°

Efficiency 94 %
Peak intensity 7 cd/lm
LEDs/each optic 1
Light colour White

Required components:

F15253_HEKLA-SOCKET-A




bridgelux.

LED V6 Gen 8
FWHM / FWTM 22.0° / 35.0°
Efficiency 94 %
Peak intensity 6.4 cd/lm
LEDs/each optic 1
Light colour White

Required components:

F15253_HEKLA-SOCKET-A




bridgelux

LED V6 HD Gen 8 FWHM / FWTM 22.0° / 35.0 + 36.0°

Efficiency 93 %
Peak intensity 6.2 cd/lm
LEDs/each optic 1
Light colour White

Required components:

F15255_HEKLA-SOCKET-C




bridgelux.

LED V8 Gen7
FWHM / FWTM 22.0° / 38.0°
Efficiency 91 %
Peak intensity 5.6 cd/lm
LEDs/each optic 1
Light colour White

Required components:

F15253_HEKLA-SOCKET-A





bridgelux


LED V9 HD Gen 8 $\mathsf{FWHM}\,/\,\mathsf{FWTM}$ 22.0° / 38.0 + 37.0°

White

Efficiency 93 % Peak intensity 5.9 cd/lm LEDs/each optic

Light colour Required components:

F15859_HEKLA-SOCKET-I




bridgelux.

LED VERO10 FWHM / FWTM 22.0° / 39.0° Efficiency 91 %

Peak intensity 5.4 cd/lm LEDs/each optic 1 White Light colour

Required components:

F15616_HEKLA-SOCKET-F



bridgelux


LED VERO13 FWHM / FWTM 24.0° / 44.0°

Efficiency 89 % Peak intensity 4.4 cd/lm 1

LEDs/each optic Light colour White

Required components:

C16142_HEKLA-SOCKET-K




bridgelux.

LED VERO18

FWHM / FWTM 33.0 + 32.0° / 62.0°

Efficiency 90 % Peak intensity 2.3 cd/lm LEDs/each optic White Light colour Required components:

C16142_HEKLA-SOCKET-K



Published: 07/07/2021



bridgelux

LED Vesta DTW 13mm (21W)

FWHM / FWTM 22.0° / 36.0°
Efficiency 93 %
Peak intensity 6.1 cd/lm
LEDs/each optic 1
Light colour White
Required components:

Bender Wirth: 632b Hekla XL

bridgelux

LED Vesta DTW 15mm (33W) FWHM / FWTM 27.0 + 26.0° / 50.0 + 49.0°

Efficiency 91 %
Peak intensity 3.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:

Bender Wirth: 632b Hekla XL

bridgelux

 LED
 Vesta DTW 6mm

 FWHM / FWTM
 22.0° / 36.0°

 Efficiency
 93 %

 Peak intensity
 6.2 cd/lm

 LEDs/each optic
 1

LEDs/each optic 1
Light colour White
Required components:


Bender Wirth: 652b Hekla

bridgelux.

LED Vesta DTW 9mm (4W/6W/12W)

FWHM / FWTM 23.0° / 39.0°
Efficiency 87 %
Peak intensity 5.1 cd/lm
LEDs/each optic 1
Light colour White
Required components:

F18158_HEKLA-RZ-LENS Bender Wirth: 652b Hekla






bridgelux

LED Vesta DTW 9mm (4W/6W/12W)

FWHM / FWTM 22.0° / 37.0°
Efficiency 91 %
Peak intensity 6 cd/lm
LEDs/each optic 1
Light colour White

Required components: Bender Wirth: 652b Hekla



bridgelux


LED Vesta TW 13mm (18W) DP FWHM / FWTM 24.0° / 46.0 + 44.0°

Efficiency 90 %
Peak intensity 4.3 cd/lm
LEDs/each optic 1

Light colour Tunable White

Required components:

C16142_HEKLA-SOCKET-K Bender Wirth: 492 Typ L8



bridgelux

 LED
 Vesta TW 15mm DP

 FWHM / FWTM
 27.0° / 50.0°

 Efficiency
 89 %


 Peak intensity
 3.4 cd/lm

LEDs/each optic 1

Light colour Tunable White

Required components:

C16142_HEKLA-SOCKET-K Bender Wirth: 482 Typ L8




bridgelux.

LED Vesta TW 9mm (9W) DP FWHM / FWTM 24.0 + 25.0° / 43.0 + 45.0°

Efficiency 93 %
Peak intensity 4.6 cd/lm
LEDs/each optic 1

Light colour Tunable White

Required components: C16142_HEKLA-SOCKET-K Bender Wirth: 489 Typ L8



Published: 07/07/2021



CITIZEN


LED CLL03x/CLU03x

FWHM / FWTM 23.0 + 22.0° / 50.0 + 48.0°

Efficiency 89 %
Peak intensity 3.9 cd/lm
LEDs/each optic 1
Light colour White

Required components:

F15859_HEKLA-SOCKET-I




CITIZEN

LED CLU700/701/702/703 FWHM / FWTM 21.0° / 36.0 + 37.0°

Efficiency 93 %
Peak intensity 6.1 cd/lm
LEDs/each optic 1
Light colour White
Required components:

F15255_HEKLA-SOCKET-C



CITIZEN

LED CLU700/701/702/703

FWHM / FWTM 20.0° / 36.0°

Efficiency 92 %


Peak intensity 6.1 cd/lm

LEDs/each optic 1

Light colour White

Required components:

F15255_HEKLA-SOCKET-C



CREE + LED

 LED
 CMA1825


 FWHM / FWTM
 24.0° / 45.0°

 Efficiency
 90 %

 Peak intensity
 4.4 cd/lm

LEDs/each optic 1
Light colour White
Required components:

F15254_HEKLA-SOCKET-B





CREE - LED

LED CMT14xx

FWHM / FWTM 22.0° / 39.0° Efficiency 91 %


Efficiency 91 %

Peak intensity 5.7 cd/ln

Peak intensity 5.7 cd/lm

LEDs/each optic 1
Light colour White

Required components: F17435_HEKLA-G2-C



CREE + LED

LED CMU10xx

FWHM / FWTM 22.0° / 40.0°


Efficiency 91 %

Peak intensity 5.5 cd/lm

LEDs/each optic 1

Light colour White Required components:

F17435_HEKLA-G2-C



CREE + LED

LED CXA/B 15xx

FWHM / FWTM 20.0° / 40.0°

Efficiency 91 %


Peak intensity 5.7 cd/lm

LEDs/each optic 1

Light colour White

Required components:

F15256_HEKLA-SOCKET-D



BLUMILEDS

LED LUXEON CoB 1202/1203


FWHM / FWTM 22.0° / 38.0°

Efficiency 93 %
Peak intensity 6 cd/lm

LEDs/each optic 1
Light colour White

Required components:

F15858_HEKLA-SOCKET-H



12/16






LED LUXEON CoB 1202HD

FWHM / FWTM 22.0° / 36.0°
Efficiency 94 %
Peak intensity 6.5 cd/lm
LEDs/each optic 1
Light colour White

Required components:

F15848_HEKLA-SOCKET-G




DIVIDITION

LED LUXEON CoB 1204/1205 FWHM / FWTM 25.0 + 24.0° / 45.0 + 46.0°

Efficiency 92 %
Peak intensity 4.3 cd/lm
LEDs/each optic 1
Light colour White
Required components:

Bender Wirth: 632a Hekla XL




MUMILEDS

LED LUXEON CoB 1204HD

FWHM / FWTM 22.0° / 40.0°
Efficiency 93 %
Peak intensity 5.5 cd/lm
LEDs/each optic 1
Light colour White

Required components:

F15858_HEKLA-SOCKET-H




DESCRIPTION LUMILEDS

LED LUXEON CoB 1205HD

FWHM / FWTM 24.0° / 42.0°
Efficiency 92 %
Peak intensity 4.9 cd/lm
LEDs/each optic 1
Light colour White

F15858_HEKLA-SOCKET-H

Required components:






MUMILEDS

LED LUXEON CoB 1208 FWHM / FWTM 24.0 + 25.0° / 48.0°

Efficiency 92 %
Peak intensity 3.9 cd/lm
LEDs/each optic 1
Light colour White
Required components:

Bender Wirth: 632a Hekla XL




LUMILEDS

LED LUXEON CX Plus CoB - HD S04H9

FWHM / FWTM 22.0° / 40.0°
Efficiency 91 %
Peak intensity 5.4 cd/lm
LEDs/each optic 1
Light colour White
Required components:

F15255_HEKLA-SOCKET-C




WNICHIA

LED COB L-Type (LES 11)

FWHM / FWTM 23.0° / 43.0°
Efficiency 90 %
Peak intensity 4.6 cd/lm
LEDs/each optic 1
Light colour White

Required components: F17437_HEKLA-G2-H



PHILIPS

Required components:

LED Fortimo SLM L15 CoB

FWHM / FWTM 26.0° / 48.0°


Efficiency 90 %

Peak intensity 3.8 cd/lm

LEDs/each optic 1

Light colour White

Bender Wirth: 632a Hekla XL






SAMSUNG

LED LC003D / LC006D / LC009D / LC013D

FWHM / FWTM 20.0° / 40.0°
Efficiency 92 %
Peak intensity 5.6 cd/lm
LEDs/each optic 1
Light colour White

F15255_HEKLA-SOCKET-C

Required components:




SAMSUNG

LED LC020T (Tunable white) FWHM / FWTM 20.0° / 42.0 + 43.0°

Efficiency 91 %
Peak intensity 5.1 cd/lm
LEDs/each optic 1
Light colour White
Required components:

F15859_HEKLA-SOCKET-I



SEOUL SEMICONDUCTOR

 LED
 MJT COB LES 14.5


 FWHM / FWTM
 26.0° / 51.0°

 Efficiency
 89 %

 Peak intensity
 3.6 cd/lm

LEDs/each optic 1
Light colour White
Required components:

F17438_HEKLA-G2-I



XICATO

 LED
 XOB 14.5 mm

 FWHM / FWTM
 26.0° / 45.0°

 Efficiency
 82 %


 Peak intensity
 3.8 cd/lm

 LEDs/each optic
 1

White

Required components: F17438_HEKLA-G2-I

Light colour





PRODUCT DATASHEET CP17783 AMY-70-M-C

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDIL Oy

Joensuunkatu 13 FI-24240 SALO Finland

LEDiL Inc.

228 West Page Street Suite D Sycamore IL 60178 USA

Ledil Optics Technology (Shenzhen) Co., Ltd.

405 , Block B Casic Motor Building Shenzhen 518057 P.R.CHINA

Local sales and technical support

www.ledil.com/ where_to_buy

Shipping locations

Salo, Finland Hong Kong, China

Distribution Partners

16/16

www.ledil.com/ where_to_buy