

AMY-70-W-C

~36° wide beam. Assembly with holder C compatible with LEDiL HEKLA. Black version.

SPECIFICATION:

Dimensions	Ø 69.9 mm
Height	16.9 mm
Fastening	socket
ROHS compliant	yes 🕕



MATERIALS:

Component	Type	Material	Colour	Finish
AMY-70-W	Single lens	PMMA		
AMY-70-HLD-C	Holder	PC	black	


ORDERING INFORMATION:

Component	Qty in box	MOQ	MPQ	Box weight (kg)
CP17784_AMY-70-W-C	210	210	15	8.4

» Box size: 480 x 280 x 300 mm



PRODUCT DATASHEET CP17784_AMY-70-W-C

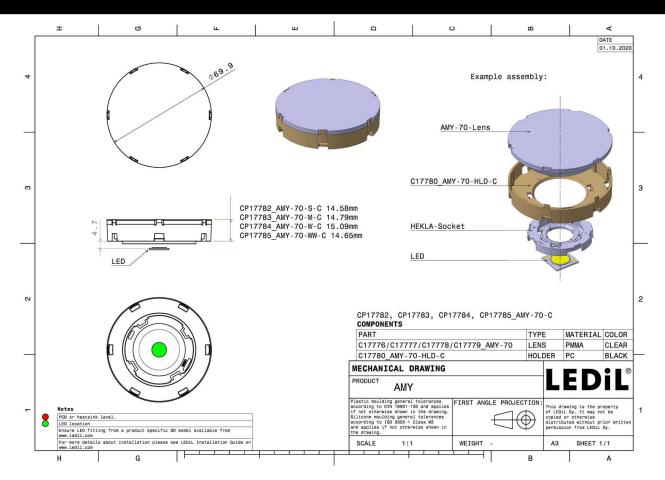


See also our general installation guide: www.ledil.com/installation_guide

Published: 07/07/2021



OPTICAL RESULTS (MEASURED):

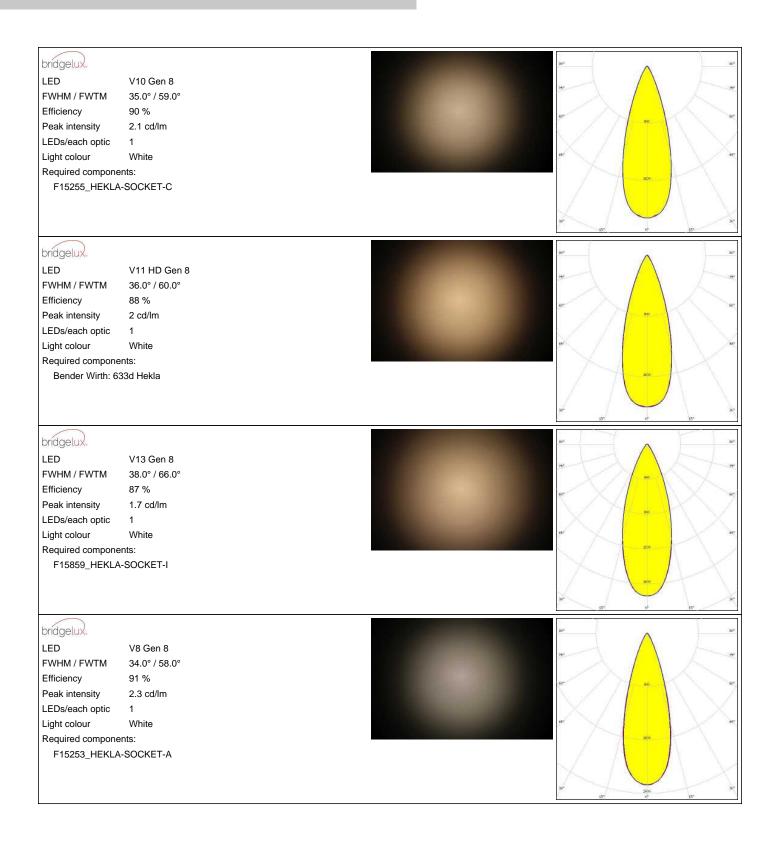



OPTICAL RESULTS (MEASURED):


CITIZEN CLL02x/CLU02x (LES10) $\mathsf{FWHM}\,/\,\mathsf{FWTM}$ 35.0° / 59.0° Efficiency 88 % Peak intensity 2.1 cd/lm LEDs/each optic Light colour White Required components: F17435_HEKLA-G2-C CREE & LED LED CMU15xx FWHM / FWTM 38.0° / 66.0° Efficiency 86 % Peak intensity 1.7 cd/lm LEDs/each optic 1 White Light colour Required components: F17438_HEKLA-G2-I

DESCRIPTION LUMILEDS

LED LUXEON Fusion 12-up (20x24)

FWHM / FWTM 33.0° / 58.0°
Efficiency 82 %
Peak intensity 2.1 cd/lm
LEDs/each optic 12
Light colour White
Required components:

C16142_HEKLA-SOCKET-K F18158_HEKLA-RZ-LENS Bender Wirth: 442 Typ L8

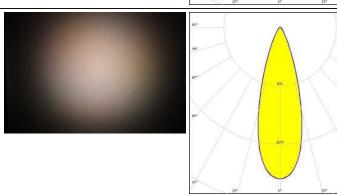


DESCRIPTION LUMILEDS

LED LUXEON Fusion 21-up (20x24)

FWHM / FWTM 33.0° / 59.0°
Efficiency 81 %
Peak intensity 2 cd/lm
LEDs/each optic 21
Light colour White
Required components:

C16142_HEKLA-SOCKET-K F18158_HEKLA-RZ-LENS Bender Wirth: 442 Typ L8

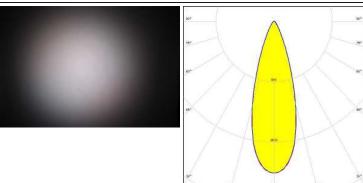




OPTICAL RESULTS (MEASURED):



LED LUXEON Fusion 27-up (20x24)

FWHM / FWTM 36.0° / 63.0°
Efficiency 81 %
Peak intensity 1.7 cd/lm
LEDs/each optic 27
Light colour White
Required components:

C16142_HEKLA-SOCKET-K F18158_HEKLA-RZ-LENS Bender Wirth: 442 Typ L8

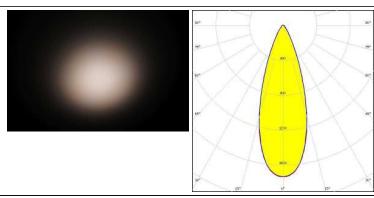

ELUMINUS


LED CTM-14 (Tunable White) Gen2

FWHM / FWTM 38.0° / 64.0°
Efficiency 87 %
Peak intensity 1.8 cd/lm
LEDs/each optic 1

Light colour Tunable White

Required components:


C16142_HEKLA-SOCKET-K Bender Wirth: 442 Typ L8

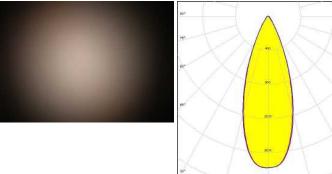

SAMSUNG

LED LC016D / LC019D / LC026D / LC033D

FWHM / FWTM 38.0° / 66.0°
Efficiency 88 %
Peak intensity 1.7 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F15859_HEKLA-SOCKET-I

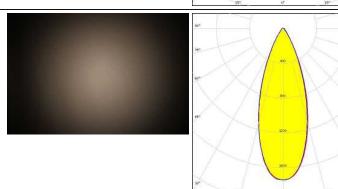



bridgelux

LED V18 Gen 8 $\mathsf{FWHM}\,/\,\mathsf{FWTM}$ 40.0° / 70.0°


Efficiency 85 %

Peak intensity 1.7 cd/lm

LEDs/each optic Light colour White

Required components:

Bender Wirth: 639b Hekla XL



bridgelux

LED V3 HD Gen 8

FWHM / FWTM 26.0° / 42.0° Efficiency 93 %


1

Peak intensity 4.2 cd/lm

LEDs/each optic White Light colour

Required components:

F15253_HEKLA-SOCKET-A



bridgelux


LED V4 HD Gen 8

FWHM / FWTM 26.0° / 44.0° Efficiency 93 %

Peak intensity 4 cd/lm LEDs/each optic

Light colour White Required components:

F15253_HEKLA-SOCKET-A




bridgelux.

LED V6 Gen 8 FWHM / FWTM 29.0° / 46.0°

Efficiency 93 % Peak intensity 3.5 cd/lm LEDs/each optic

White Light colour Required components:

F15253_HEKLA-SOCKET-A






bridgelux

LED V6 HD Gen 8 $\mathsf{FWHM}\,/\,\mathsf{FWTM}$ 29.0 + 28.0° / 46.0°

Efficiency 92 % Peak intensity 3.5 cd/lm LEDs/each optic Light colour White

Required components:

F15255_HEKLA-SOCKET-C




bridgelux.

LED V8 Gen7 FWHM / FWTM 30.0° / 50.0° Efficiency 90 % Peak intensity 3.1 cd/lm

LEDs/each optic 1 White Light colour

Required components:

F15253_HEKLA-SOCKET-A




bridgelux

V9 HD Gen 8 LED FWHM / FWTM 30.0 + 29.0° / 48.0°

Efficiency 91 % Peak intensity 3.3 cd/lm LEDs/each optic 1 Light colour White

Required components:

F15859_HEKLA-SOCKET-I




bridgelux.

LED VERO10 FWHM / FWTM 31.0° / 52.0° Efficiency 89 % Peak intensity 2.9 cd/lm LEDs/each optic

White Light colour Required components:

F15616_HEKLA-SOCKET-F



Published: 07/07/2021



bridgelux

LED VERO13 $\mathsf{FWHM}\,/\,\mathsf{FWTM}$ 34.0° / 56.0° 88 %

Efficiency Peak intensity 2.4 cd/lm LEDs/each optic

Light colour White

Required components:

C16142_HEKLA-SOCKET-K

bridgelux.

LED VERO18

FWHM / FWTM 39.0 + 38.0° / 70.0 + 71.0°

Efficiency 88 % Peak intensity 1.7 cd/lm LEDs/each optic 1 White Light colour Required components:

C16142_HEKLA-SOCKET-K


bridgelux

LED Vesta DTW 13mm (21W) FWHM / FWTM $28.0 + 29.0^{\circ} / 46.0^{\circ}$

Efficiency 92 % Peak intensity 3.4 cd/lm LEDs/each optic 1 Light colour White

Required components:

Bender Wirth: 632b Hekla XL



bridgelux.

LED


FWHM / FWTM

36.0 + 35.0° / 60.0 + 59.0°

Vesta DTW 15mm (33W)

Efficiency 90 % Peak intensity 2.2 cd/lm LEDs/each optic White Light colour Required components:

Bender Wirth: 632b Hekla XL



Published: 07/07/2021



bridgelux


LED Vesta DTW 6mm FWHM / FWTM 30.0° / 46.0°

Efficiency 92 %
Peak intensity 3.4 cd/lm

LEDs/each optic 1
Light colour White

Required components:

Bender Wirth: 652b Hekla




bridgelux

LED Vesta DTW 9mm (4W/6W/12W)

FWHM / FWTM 30.0 + 31.0° / 48.0°

Efficiency 92 %
Peak intensity 3.1 cd/lm
LEDs/each optic 1
Light colour White

Required components: Bender Wirth: 652b Hekla



bridgelux

LED Vesta TW 13mm (18W) DP FWHM / FWTM 35.0 + 32.0° / 57.0 + 56.0°

Efficiency 89 %
Peak intensity 2.5 cd/lm
LEDs/each optic 1

Light colour Tunable White

Required components: C16142_HEKLA-SOCKET-K

Bender Wirth: 492 Typ L8


bridgelux.

LED Vesta TW 15mm DP FWHM / FWTM 35.0 + 36.0° / 61.0 + 60.0°

Efficiency 88 %
Peak intensity 2.1 cd/lm
LEDs/each optic 1

Light colour Tunable White

Required components: C16142_HEKLA-SOCKET-K Bender Wirth: 482 Typ L8





bridgelux


LED Vesta TW 9mm (9W) DP FWHM / FWTM 34.0 + 35.0° / 53.0 + 54.0°

Efficiency 92 %
Peak intensity 2.7 cd/lm
LEDs/each optic 1

Light colour Tunable White

Required components:

C16142_HEKLA-SOCKET-K Bender Wirth: 489 Typ L8




CITIZEN

LED CLL03x/CLU03x FWHM / FWTM 36.0° / 64.0 + 63.0°

Efficiency 87 %
Peak intensity 2 cd/lm
LEDs/each optic 1
Light colour White
Required components:

F15859_HEKLA-SOCKET-I




CITIZEN

LED CLU700/701/702/703 FWHM / FWTM 30.0 + 31.0° / 50.0°

Efficiency 91 %
Peak intensity 3 cd/lm
LEDs/each optic 1
Light colour White

Required components:

F15255_HEKLA-SOCKET-C




CITIZEN

Required components:

LED CLU700/701/702/703 FWHM / FWTM 30.0 + 31.0° / 52.0°

Efficiency 90 %
Peak intensity 2.9 cd/lm
LEDs/each optic 1
Light colour White

F15255_HEKLA-SOCKET-C





CREE + LED

 LED
 CMA1825


 FWHM / FWTM
 35.0° / 56.0°

 Efficiency
 89 %

 Peak intensity
 2.5 cd/lm

LEDs/each optic 1
Light colour White
Required components:

F15254_HEKLA-SOCKET-B



CREE + LED

 LED
 CMT14xx


 FWHM / FWTM
 31.0° / 50.0°

 Efficiency
 89 %

 Peak intensity
 2.9 cd/lm

Peak intensity 2.9 cd/
LEDs/each optic 1
Light colour White

Required components: F17435_HEKLA-G2-C



CREE + LED

 LED
 CMU10xx


 FWHM / FWTM
 32.0° / 50.0°

 Efficiency
 90 %

 Peak intensity
 2.9 cd/lm

LEDs/each optic 1
Light colour White

Required components: F17435_HEKLA-G2-C



CREE + LED


LED CXA/B 15xx

FWHM / FWTM 33.0 + 32.0° / 54.0 + 55.0°

Efficiency 88 %
Peak intensity 2.6 cd/lm
LEDs/each optic 1
Light colour White

F15256_HEKLA-SOCKET-D

Required components:







LED LUXEON CoB 1202/1203

FWHM / FWTM 32.0° / 50.0°
Efficiency 91 %
Peak intensity 3 cd/lm
LEDs/each optic 1
Light colour White

Required components:

F15858_HEKLA-SOCKET-H

DESCRIPTION

LED LUXEON CoB 1202HD

FWHM / FWTM 28.0° / 46.0°

Efficiency 92 %


Peak intensity 3.6 cd/lm

LEDs/each optic 1

Light colour White

Required components:

F15848_HEKLA-SOCKET-G




DESCRIPTION LUMILEDS

LED LUXEON CoB 1204/1205 FWHM / FWTM 35.0° / 57.0 + 56.0°

Efficiency 91 %
Peak intensity 2.4 cd/lm
LEDs/each optic 1
Light colour White
Required components:

Bender Wirth: 632a Hekla XL




DESCRIPTION LUMILEDS

LED LUXEON CoB 1204HD

FWHM / FWTM 32.0° / 50.0°
Efficiency 91 %
Peak intensity 3 cd/lm
LEDs/each optic 1
Light colour White
Required components:

F15858_HEKLA-SOCKET-H








LED LUXEON CoB 1205HD FWHM / FWTM 34.0 + 32.0° / 54.0°

Efficiency 91 %
Peak intensity 2.7 cd/lm
LEDs/each optic 1
Light colour White

Required components:

F15858_HEKLA-SOCKET-H




DIVIDITION

LED LUXEON CoB 1208 FWHM / FWTM 34.0 + 35.0° / 59.0°

Efficiency 90 %
Peak intensity 2.3 cd/lm
LEDs/each optic 1
Light colour White
Required components:

Bender Wirth: 632a Hekla XL




DESCRIPTION LUMILEDS

LED LUXEON CX Plus CoB - HD S04H9

FWHM / FWTM 32.0° / 51.0°
Efficiency 89 %
Peak intensity 2.8 cd/lm
LEDs/each optic 1
Light colour White

Required components:

F15255_HEKLA-SOCKET-C




WNICHIA

LED COB L-Type (LES 11)

FWHM / FWTM 33.0° / 56.0°
Efficiency 89 %
Peak intensity 2.5 cd/lm
LEDs/each optic 1
Light colour White

Required components: F17437_HEKLA-G2-H






PHILIPS

LED Fortimo SLM L15 CoB

FWHM / FWTM 34.0° / 60.0°
Efficiency 89 %
Peak intensity 2.2 cd/lm
LEDs/each optic 1
Light colour White

Required components:

Bender Wirth: 632a Hekla XL




SAMSUNG

LED LC003D / LC006D / LC009D / LC013D

FWHM / FWTM 32.0 + 33.0° / 56.0°

Efficiency 90 %
Peak intensity 2.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:

F15255_HEKLA-SOCKET-C




SAMSUNG

LED LC020T (Tunable white)

FWHM / FWTM 34.0° / 58.0°
Efficiency 89 %
Peak intensity 2.3 cd/lm
LEDs/each optic 1

Light colour White Required components:

F15859_HEKLA-SOCKET-I





LED MJT COB LES 14.5

FWHM / FWTM 36.0° / 61.0°


Efficiency 88 %

Peak intensity 2.1 cd/lm

LEDs/each optic 1

Light colour White

Required components: F17438_HEKLA-G2-I





XICATO

 LED
 XOB 14.5 mm


 FWHM / FWTM
 33.0° / 56.0°

 Efficiency
 81 %

Peak intensity 2.3 cd/lm

LEDs/each optic 1
Light colour White

Required components: F17438_HEKLA-G2-I





PRODUCT DATASHEET CP17784_AMY-70-W-C

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDIL Oy

Joensuunkatu 13 FI-24240 SALO Finland

LEDiL Inc.

228 West Page Street Suite D Sycamore IL 60178 USA

Ledil Optics Technology (Shenzhen) Co., Ltd.

405 , Block B Casic Motor Building Shenzhen 518057 P.R.CHINA

Local sales and technical support

www.ledil.com/ where_to_buy

Shipping locations

Salo, Finland Hong Kong, China

Distribution Partners

16/16

www.ledil.com/ where_to_buy

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Ledil:

CP17784_AMY-70-W-C